

# GAS TURBINES TRANSIENT PERFORMANCE STUDY FOR AXIAL COMPRESSOR OPERATION CHARACTERISTICS

**Franco J. dos S. Silva, jefferds@ita.br**

Gas Turbine Group - CTA/ITA/IEM - FAX: +55 - 12 - 3947 - 5967, 12.228 - 900 - São José dos Campos - SP - Brazil.

**Jesuino T. Tomita, jtakachi@ita.br**

Gas Turbine Group - CTA/ITA/IEM - FAX: +55 - 12 - 3947 - 5967, 12.228 - 900 - São José dos Campos - SP - Brazil.

**João R. Barbosa, barbosa@ita.br**

Gas Turbine Group - CTA/ITA/IEM - FAX: +55 - 12 - 3947 - 5967, 12.228 - 900 - São José dos Campos - SP - Brazil.

**Abstract.** *At design point the gas turbines operate efficiently and safely because all their components are well matched and the flow aligned with the blades passages to avoid high losses. Unfortunately, gas turbines are required to operate at off-design over a wide range of operation conditions, which depend on the engine applications whether at land, sea or air, both civil and military. The components matching should be analyzed for engine performance improvement. In this work, the results of transient performance simulation are evaluated based in the axial compressor characteristic operation specially designed with VIGV (Variable Inlet Guide Vanes) to improve its efficiency, so two different computational codes are used, one to calculate the compressor design and off-design characteristics and other to calculate the engine transient performance. The model used in the transient calculation considers the shaft and volume transient phenomena.*

**Keywords:** *Gas turbine, propulsion, axial compressor, transient simulation, performance, variable geometry and design.*

## 1. INTRODUCTION

The gas turbine operation behavior depends on the efficiency of its components like compressor, combustion chamber and turbine. A good matching among gas turbines components result in good fuel consumption and good efficiency at all operation conditions of interest for both steady-state and transient regimes (Jefferds *et al.*, 2005). All components are designed to operate efficiently at design point, but unfortunately at off-design the efficiency deteriorates.

Some factors contribute directly to the gas turbines technology: the improvement of the metallurgy allowing operations at high turbine inlet temperature; the development of the aero-thermodynamic models for the blade profile design with low losses (friction and separation) and the cooling of turbine blades.

The new computer hardware is another important factor during engine design. Simulation is used to reduce the experimental work and costs through optimizations (Silva, 2006). The impossibility of experimental measurements usually requires computational effort to the access restricted or to simulate dangerous operatins conditions. Therefore, numerical simulations become an indispensable tool for engines designers.

For years the specialists are studying and developing robust computational codes that reproduce the results of experimental data design aiming at and improvement (Barbosa and Bringhenti, 1999). Many mathematical formulations were created and it used to calculate geometry and flow behavior in blade passages.

This work deals with a study of transient behavior components and engine using an axial compressor with variable geometry to aiming at the increase of the efficiency at off-design point. The compressor performance was calculated for rotational speeds of interest, using the computational code named AFCC (Axial Flow Compressor Code)(Tomita, 2003) and the engine deck GTAnalysis for the calculation of the engine performance (Bringhenti, 1999). The axial compressor designed, its performance details and the engine transient behavior is discussed below.

## 2. NOMENCLATURE

$Cl_{v_{opt}}$	Optimum lift coefficient
$D$	Hydraulic diameter
$h/t$	Hub-tip-ratio
$(i_0)_{10}$	Incidence for zero camber angle at 10% chord
$(i_D - i_{2D})$	Deduced variation of average rotor reference incidence angle minus low speed two dimensional cascade rule reference incidence angle with relative Mach number
$i_{ml}$	Minimum loss incidence
$i_{stall}$	Stall incidence
$\dot{m}$	Mass flow
$K_i$	Thickness correction for zero camber incidence

$L$	Angular momentum
$m$	Mass
$M_n$	Relative Mach number
$n$	Slope factor
$pr$	Pressure ratio
$P_t$	Total or stagnation pressure
$\dot{q}$	Heat flow
$R$	Constant dos gases
$R_x$	Viscous force
$s/c$	Space-chord-angle
$t$	Time
$t/c$	Thickness-chord-ratio
$T$	Static temperature
$T_t$	Total or stagnation temperature
$u$	Internal Energy
$U_t$	Tip speed
$V$	Velocity
$x$	Axial dimension
$\alpha_{2_{opt}}$	Optimum outlet flow angle
$\beta_1$	Inlet blade angle
$\beta_2$	Outlet blade angle
$\theta$	Camber angle
$\delta$	Deviation
$\delta_{opt}$	Optimum deviation ratio
$\zeta$	Blade stagger angle
$\xi$	Friction coefficient
$\eta_{is}$	Isentropic efficiency
$\rho$	Density
$\tau_{ext}$	External torque

### 3. THE AXIAL COMPRESSOR

The design parameters for the axial compressor related in this work is show in Tab. 1. It is a 5-stages compressor design with the AFCC (Axial Flow Compressor Code). The figures 1 to 7 was generate with AFCC output data. The channel was designed with constant outer diameter (COD) as shows in Fig. 1.

Table 1. The axial flow design parameters.

Parameters	Values
$P_t$ at inlet (Pa)	101325
$T_t$ at inlet (K)	288.15
$M_n$ at inlet	0.55
$M_n$ at outlet	0.25
$pr$	5.0
$\eta_{is}$ (%)	88.5
$U_t$ (m/s)	375
$h/t$ at inlet	0.42
$\dot{m}$ (kg/s)	8.0

Some design parameters were carefully analyzed in order to take care of stress limitations. Tip speed was limited to 450 m/s (Saravanamuttoo *et al.*, 2001; Walsh and Fletcher, 1998 and Giampaolo, 2003) due to the material limitation. Hub-tip-ratio and blade chord were selected to take account of blade loading (Day, 2006) and stall (Eqs. 1 and 2).

Figures 2 and 3 show the relative inlet Mach number and flow coefficient to each row of rotors and stators. The Fig. 4 shows axial velocity distributions at design point to each stage (Saravanamuttoo *et al.*, 2001). In this work, the criteria adopted for incidence angles follows Tomita, 2003; Tomita and Barbosa, 2004 and Johnsen and Bullock, 1956. Fig. 5 shows the stall and minimum loss incidences.

$$i_{stall} = f(\alpha_{2_{opt}}; Clv_{opt}; \beta_1; \beta_2; i_{opt}; \theta; \delta_{opt}; s/c; \zeta) \quad (1)$$

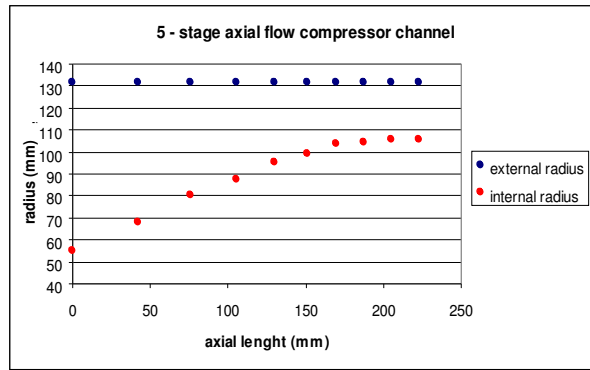


Figure 1. Axial compressor channel (COD).

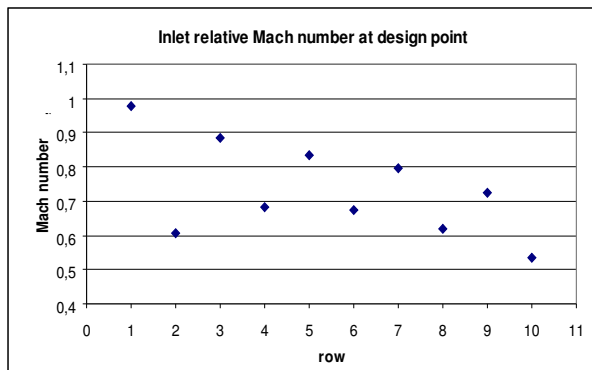


Figure 2. Relative Mach number for each row.

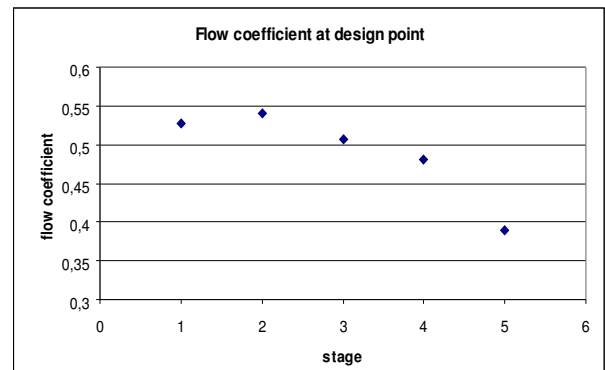


Figure 3. Flow coefficient for each stage.

$$i_{ml} = K_i(i_0)_{10} + n\theta + (i_D - i_{2D}) \tag{2}$$

To account for high speed flows (Mach number greater than unity), the Eq. (2) is corrected as indicated in Eq. (3).

$$i_{ml}^* = i_{ml} + 0.5 \left\{ a \tan \left[ \frac{4 \left( \frac{t}{c} \right)}{\theta} \right] \right\} \left[ 1 + \sin \left( \frac{\pi}{2} \frac{M_{n \text{ relative}} - M_n}{1 - M_{n \text{ relative}}} \right) \right] \tag{3}$$

This compressor was designed with variable inlet guide vanes (VIGV's) and Bleed-of-Valve (BOV) to avoid problems of high flow losses (Walsh and Fletcher, 1998 and Serovy and Kavanagh, 1968) when the engine runs at part-load. As result, the compressor efficiency increases and the stability margin is improved.

The VIGV's angles and the percentage of flow bleed are presented in Tab. 2. All rotational speeds are presented in the percentage of design-point speed following the literatures (Saravanamuttoo *et al.*, 2001 and Walsh and Fletcher, 1998).

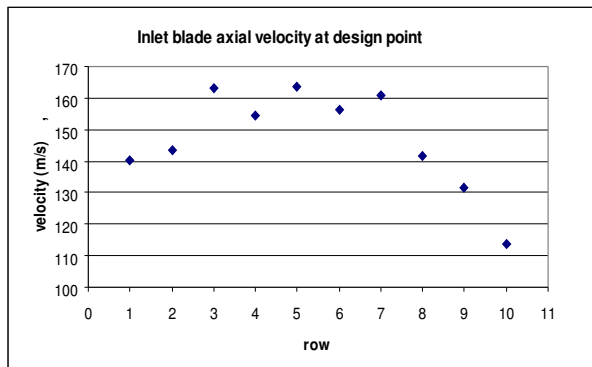


Figure 4. Axial velocities distributions.

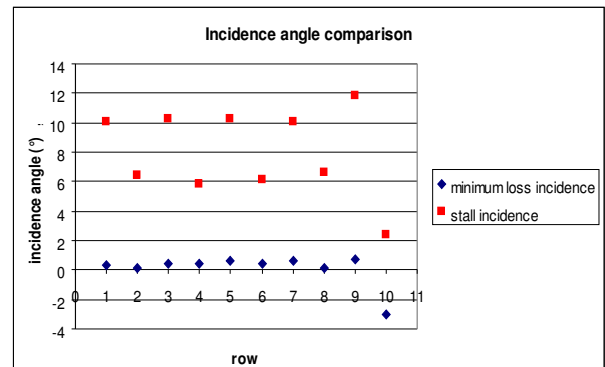


Figure 5. Stall and minimum loss incidences.

The BOV was considered installed between fourth rotor and fourth stator rows. The axial flow compressor performance and its efficiency characteristics are shown in Figs. 6 and 7.

Table 2. VIGV and flow bleed for each rotational speedy.

N (%)	VIGV (°)	Bleed (%)
1	0	0
0.95	10	0
0.9	15	0
0.85	20	10
0.8	20	10
0.78	22	10
0.75	25	10
0.72	27	10
0.68	30	15
0.65	30	15
0.62	30	15
0.58	30	20

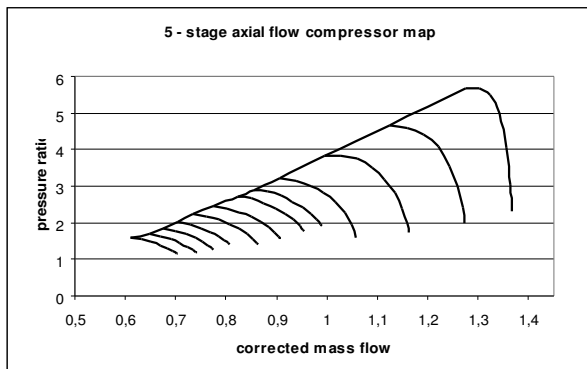


Figure 6. Axial flow compressor performance.

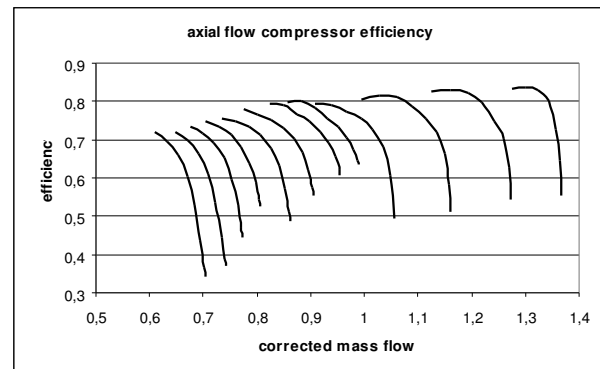


Figure 7. Axial flow compressor efficiency.

The compressor characteristic data was exported to the engine deck for the calculation of the running line and for the transient.

#### 4. GAS TURBINE PERFORMANCE

Some special operation points for both steady and transient regimes, must be known in advance to avoid instabilities and risk of operation very close of the surge line.

GTAnalysis is a computer program (Bringhenti, 1999), that is able to simulate engines, numerically, at in steady-state or transient regimes (Silva, 2006). Almost all gas turbine configurations (turbo-shaft, turbojet, gas generator with free turbine and turbofan), with or without variable geometry can be analyzed (Bringhenti, 2003). The heat transfer among the engine metallic parts and gas flow, as well as the variations of engine dimensions were not taken into account, so that only shaft and volume transients were considered.

##### 4.1 Important transient aspects

It is important to know in advance the engine performance characteristics. The accurate engine performance predictions at transient operation in of the engine in reasonable time affects directly the design, maintenance and operation costs. The transient phenomena occur during acceleration or deceleration process when the engine thrust is changed.

The transient behavior depends on several parameters including the engine type, the characteristics of the components like compressor, combustion chamber and turbine and the operation conditions as altitude (Ganji *et al.*, 1993).

On turbojet engines the performance variation is caused basically by variation of maximum temperature in the cycle. High turbine inlet temperature increases the turbine power. The deceleration occurs in an inverse process. Temperatures, pressures, mass flow, rotational speed and thrust, for example, change during transients.

The engine accelerations and decelerations are executed constantly. Setting fast engine acceleration cause the fuel to increased up to 20 times greater than the values observed at steady-state and causes high levels of temperature, and the components life reduction (Kotsiopoulos *et al.*, 1997). On the order hand if acceleration is slow, the fuel flow is varies slowly causing less live degradation. Time of acceleration can be the limiting value for military applications.

## 5. SIMULATIONS

The simulations were performed considering shaft and volume transients. The mass, momentum and energy changes determine the behavior of the transient operation.

**Shaft transient:** relates to the torque and rotating parts and its changes with the time. The shaft transient is highly dependent of the inertia distribution of the rotational parts.

**Volume transient:** relates to the gas dynamics effects in the engine volume, generating high pressure variations (Ramos and Sirignano, 1981). The components with high volumes like combustion chamber, ducts and heat exchangers, have strong influence on transient. In these volumes the mass is stored with consequent difference between inflow and outflow fluxes, that contributes to the unbalancing of power between compressor and turbine.

The influence of the fluid dynamic motion is neglected, being more significant the effect due to inertia of the rotating parts and the heat transfer of the metallic parts (Peretto and Spina, 1997 and Saravanamuttoo and Issac, 1982). The transient of volume is important mainly for fast power changes. The combustion chamber usually has is of large volume becoming very important in this context.

### 5.1 Mathematical modelling

The models implemented for shaft transient simulations are derived from law that establishes the relation between the external torque that act in the system, as displayed in Fig. 8, and the variation of angular momentum, as show in the Eq.(4).

$$\tau_{ext} = \frac{dL}{dt} \quad (4)$$

Conservation of mass, Eq.(5), momentum, Eq.(6) and energy, Eq.(9), together with the equation of perfect gas, Eq.(10) are used to calculate the transient of volume.

**Continuity equation:**

$$\frac{\partial \rho}{\partial t} + \frac{\partial (\rho V)}{\partial x} = 0 \quad (5)$$

**Momentum equation:**

$$\frac{\partial V}{\partial t} + V \frac{\partial V}{\partial x} + \frac{1}{\rho} \frac{\partial p}{\partial x} + 2\xi \frac{V^2}{D} = 0 \quad (6)$$

with

$$\xi = \frac{T_w}{\frac{1}{2}\rho V^2} \quad (7)$$

and

$$D = \sqrt{\frac{4A}{\pi}} \quad (8)$$

**Energy equation:**

$$\frac{\partial u}{\partial t} + V \frac{\partial u}{\partial x} + \frac{p}{\rho} \frac{\partial V}{\partial x} - 2\xi \frac{V^3}{D} - \dot{q} = 0 \quad (9)$$

**Perfect gas equation:**

$$p = \rho RT \quad (10)$$

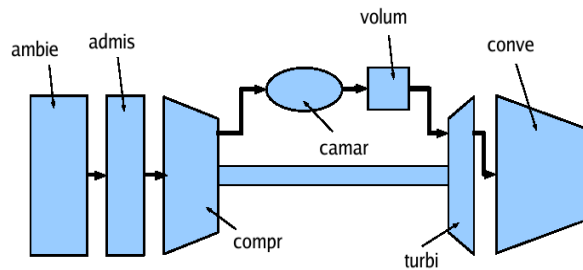


Figure 8. Engine configuration Diagram.

## 5.2 Numerical simulation results

In this section, the results of the transient calculations are presented. The configuration of the turbojet engine is shown in Fig. 8.

For this simulation the turbine inlet temperature is decrease 300K from the design point and a time of 70s is wanted until stabilization at the new steady state. Then the turbine inlet temperature is increased to the design point value and sustained until the stabilization. The time-step used for numerical integration is of 0.02s.

This temperature variation results in the variation of the engine parameters such as speed, thrust and fuel consumption as presented in Fig. 9, as percentages of the design point values.

The operation curves are close to the surge line in the acceleration process (red line). During the deceleration an inverse process occur in the engine (blue line). The variations of mass flow and pressure can be observed when the transient process is started, as indicated in Figures 10 and 11.

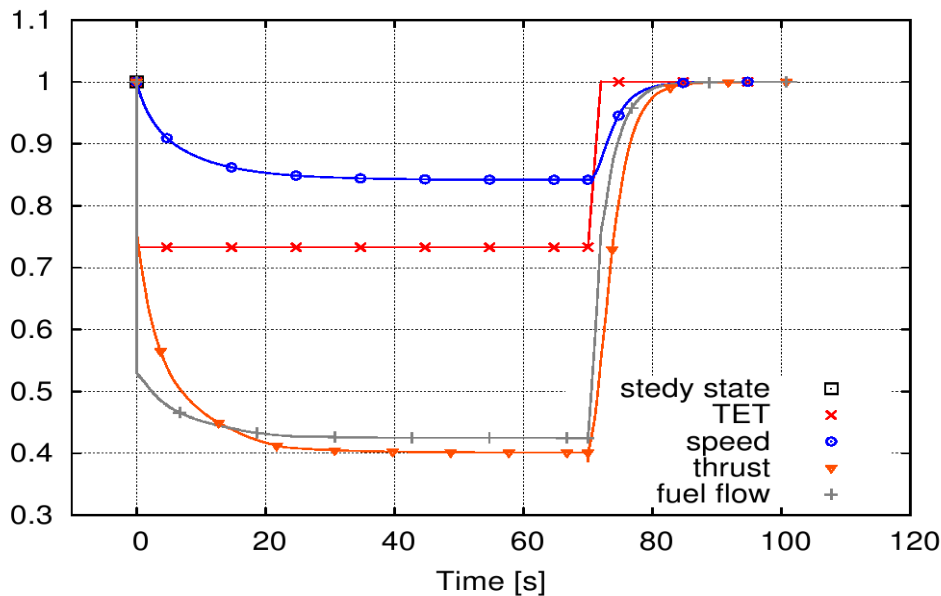


Figure 9. Engine parameters variations as percentages of the design point values.

The engine running line draw superimposed to the compressor characteristic show the operation too near the surge line indicating a good efficiency during the acceleration process as show in Fig. 11.

For other part-load speed, such as 75% the time-step applied in the time integration was lowed to avoid numerical instability problems and consequently numerical divergence.

## 6. CONCLUSIONS

The design of a good axial flow compressor equipped with VIGVs and BOV, to increase the stability area and consequently the compressor efficiency, is very important to avoid premature stall and surge during the engine transient operation mainly during the accelerations process.

The shaft transient has greater influence in the engine dynamic behavior and supplies the main characteristics of transient regime. The volume transient, in contrast, occurs in very small time interval being less evident in transient engine.

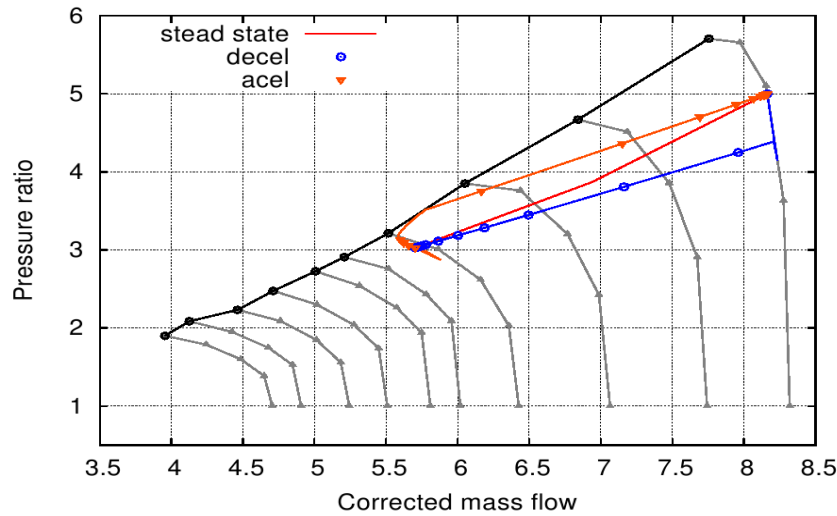


Figure 10. Characteristics compressor.

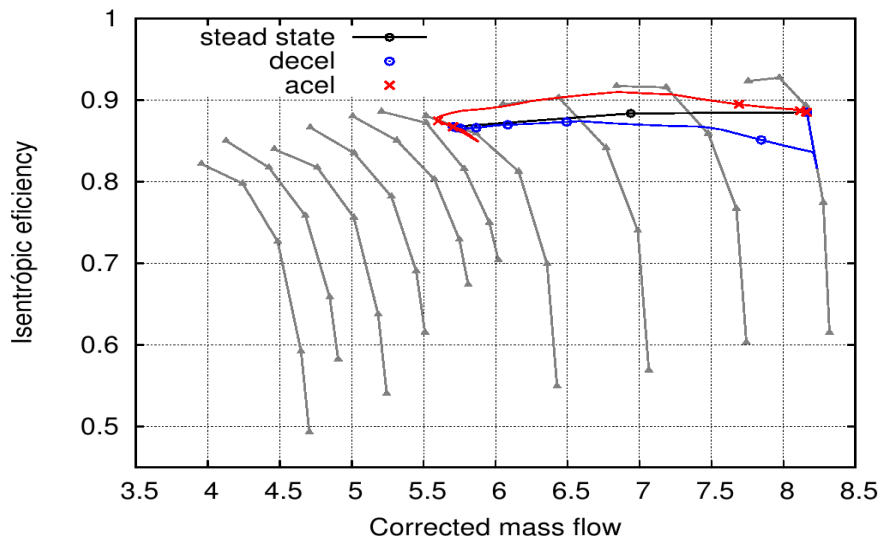


Figure 11. Stall and minimum loss incidences.

The compressor design and analysis in a preliminary phase of a gas turbine project can be done with the aid of numerical simulation computational programs.

## 7. ACKNOWLEDGEMENTS

The authors thank CNPq (Conselho Nacional de Desenvolvimento Científico e Tecnológico) and FINEP (Financiadora de Estudos e Projetos) for their support to this research, developed at the Center of Reference for Gas Turbine, ITA.

## 8. REFERENCES

- Barbosa, J. R.; Bringhamti, C. “*Simulação Numérica do Desempenho de Turbinas a Gás*”. COBEM. 1999.
- Braithwaite, R.B. “*The Foundations of Mathematics and Other Logical Essays*”. Harcourt Brace Jovanovich, New York, 1931.
- Bringhamti, C. “*Analysis of Steady State Gas Turbine Performance*”. M. sc., Instituto Tecnológico de Aeronáutica, São José dos Campos, 1999.
- Bringhamti, C. “*Variable Geometry Gas Turbine Performance Analysis*”. Ph. d., Instituto Tecnológico de Aeronáutica, São José dos Campos, 2003.
- Day, I. “*The fundamentals of stall and surge. In Advances in Axial Compressor Aerodynamics, VKI Lecture Series*”. Von Karman Institute, 2006.

- Fox, L. "*Advances in Programming and Non-Numerical Computation*". Pergamon, Oxford, UK, 1966.
- Ganji, A. R.; Khadem, M. and Khandani, S.M.H., "*Transient dynamics of gas turbine engines*". International Gas Turbine and Aeroengine Congress and Exposition, May 1993.
- Giampaolo, T., "*The Gas Turbine Handbook: Principles and Practices*". The Fairmont Press, third edition, 2003.
- Jefferds, F.S.S.; Bringham, C. and Barbosa, J.R., "*Transient performance of gas turbine*". 18th International Congress Mechanical Engineering, (COBEM2005-1355), November 2005.
- Johnsen, I.A. and Bullock, R.O. "*Aerodynamic design of axial flow compressors*". NASA, (NASA SP-36), 1956.
- Kotsiopoulos, P. Pilidis, P. and Adamopoulos, D., "*Transient performance analysis of a two spool turbofan for lifting and handling purposes*", The 1997 International Gas Turbine & Aeroengine Congress & Exposition, June 1997. 8 pp.
- Peretto, A. and Spina, P.R. "*Comparison of Industrial Gas Turbine Transient Responses Performed by Different Dynamic Models*". International Gas Turbine Aeroengine Congress Exposition, (97-GT-177), June 1997.
- Ramos, J.I. and Sirignano, W.A. "*The calculation of the pressure in unsteady flows using a control-volume approach*". Journal of Computational Physics, 41(1):211-216, May 1981.
- Saravanamuttoo, H.I.H. and Issac, B.D. "*An Overview of Engine Dynamic Response and Mathematical Modeling Concepts*". In AGARD Conference Proceedings, number 324, 1982.
- Saravanamuttoo, H.I.H. , Rogers, G.F.C. and Cohen, H. "*Gas Turbine Theory*". Practice Hall, England, 5 edition, 2001.
- Serovy, G.K. and Kavanagh, P. "*Considerations in the design of variable geometry blading for axial-flow compressor stages*". AGARD, (AGARD CP - 34), September 1968.
- Silva, F.J.S. "*Simulação de desempenho de turbinas a gás em regime transitório.*" Master's thesis, Instituto Tecnológico de Aeronáutica, São José dos Campos, Brasil, Agosto 2006.
- Tomita, J.T. and Barbosa, J.R. "*Design and Analysis of an Axial Flow Compressor for a 1 MW Gas Turbine*". In Proceedings..., Rio de Janeiro, Brazil, Dec 2004. Braz. Soc. of Mechanical Sciences and Engineering - ABCM, 10th Brazilian Congress of Thermal Sciences and Engineering - ENCIT 2004.
- Tomita, J.T. "*Numerical simulation of axial flow compressors*"., April 2003.
- Walsh, P.P. and Fletcher, P., "*Gas Turbine Performance*". Blackwell Science, Oxford, Edinburgh, Malden, 1998.
- Winston, P.H. editor. "*The Psychology of Computer Vision*". McGraw-Hill, New York, 1975.

## 9. Responsibility notice

The authors are the only responsible for the printed material included in this paper.