



BLADE DESIGN OF A 100 KW HORIZONTAL AXIS WIND TURBINE USING XFOIL

Felipe José Vinaud

João Carlos Menezes

Institution Instituto Tecnológico de Aeronáutica, DCTA, ITA, IEM, Praça Mal. Eduardo Gomes, 50, São José dos Campos, SP, Brazil, CEP 12228900

felipevinaud@gmail.com ; menezes@ita.br

Abstract. This paper focuses on the development of a blade design tool for horizontal axis wind turbines with variable geometry. The design tool consists of an in-house MatLab program based on the XFOIL aerodynamic software, including tip and rotational wake losses as well as blade pitching and blade twisting effects. Taking into account the Glauert Blade Element Momentum Theory, the program enables predictions of aerodynamic power, efficiency and forces acting on the wind turbine blades for a given operating condition. Numerical results in terms of aerodynamic performance are presented for a 100 kW wind turbine for an optimum blade shape.

Keywords: Wind Energy, Wind Turbine Design

1. INTRODUCTION

Since the demand for energy, more specifically electricity, has increased dramatically over the last 100 years, it has now become important to consider the environmental impacts of energy production. Therefore, there is general agreement that to avoid energy crisis, the amount of energy needed to sustain society will have to be contained and, to the extent possible, renewable sources will have to be used. Consequently, conservation and renewable energy technologies are going to increase in importance and reliable, up-to-date information about their availability, efficiency, and cost is necessary for planning a secure energy future.

Among many sustainable energy sources is the wind energy. Much of the present effort in this field is focused on the optimization of turbine blades. The correct blade geometry is a goal which has to be reached by means of correct analysis of airfoils aerodynamic fundamentals.

Glauert Blade Element Momentum Theory has been widely employed as an efficient tool for obtaining the proper blade geometry. Nevertheless, it depends on the accurate calculations of lift and drag forces for a given airfoil.

XFOIL is an interactive program for the design and analysis of subsonic isolated airfoils. Given the coordinates specifying the shape of a 2D airfoil, Reynolds and Mach numbers, XFOIL can calculate the pressure distribution on the airfoil and hence lift and drag characteristics.

One may conclude that along the blade span the airfoil thickness and Reynolds number varies. Employing the Blade Element Method, for the most accurate results, lift and drag has to be obtained locally for each element. In order to carry out these calculations, in this work, XFOIL has been used as an auxiliary code (Drela, 1989). The main computational program, using an iterative procedure, calls XFOIL informing the airfoil local geometry and the Reynolds number. XFOIL returns the lift and drag curves for a given range of attack angles.

2. AERODYNAMICS OF WIND TURBINES AND OPTIMIZATION

A model attributed to Betz, can be used to determine the power from an ideal turbine rotor. This model is based on a linear momentum theory. Assuming a decrease in wind velocity between the free stream and the rotor plane, an axial induction factor, a , can be defined.

$$a = \frac{U - U_d}{U} \quad (1)$$

where, U is the free stream wind velocity and U_d is the wind velocity at the rotor plane disk.

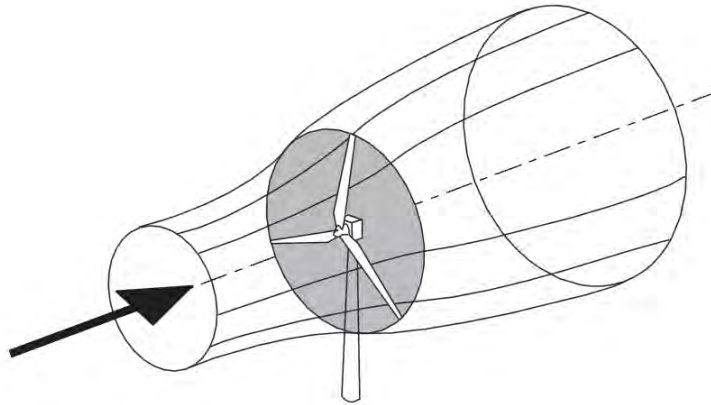


Figure 1. The Energy Extracting Stream-tube of a Wind Turbine.

The governing principle of conservation of flow momentum can be applied for both axial and circumferential directions. For the axial direction, the change in flow momentum along a stream-tube starting upstream, passing through the propeller disk area and then moving off into the slipstream must equal the thrust produced by this element of the blade. To remove the unsteady effects due to the propeller's rotation, the stream-tube, according to Fig. 1 used is one covering the complete area, A , of the propeller disk swept out by the blade element and all variables are assumed to be time-averaged values. The axial thrust on the rotor plane disk is given by (Manwell, 2002):

$$T = \frac{1}{2} \rho A U^2 [4a(1-a)] \quad (2)$$

where ρ is the air density.

The power out, P , is equal to the thrust times the velocity at the disk:

$$P = \frac{1}{2} \rho A U^3 4a(1-a)^2 \quad (3)$$

Wind turbine rotor performance is usually characterized by its power coefficient, C_p , which represents the fraction of the power in the wind that is extracted by the rotor:

$$C_p = \frac{P}{\frac{1}{2} \rho U^3 A} = \frac{\text{Rotor power}}{\text{Power in the wind}} \quad (4)$$

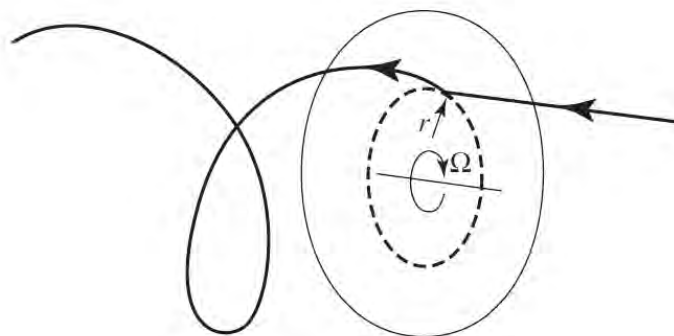


Figure 2. The Trajectory of an Air Particle Passing Through the Rotor Disc.

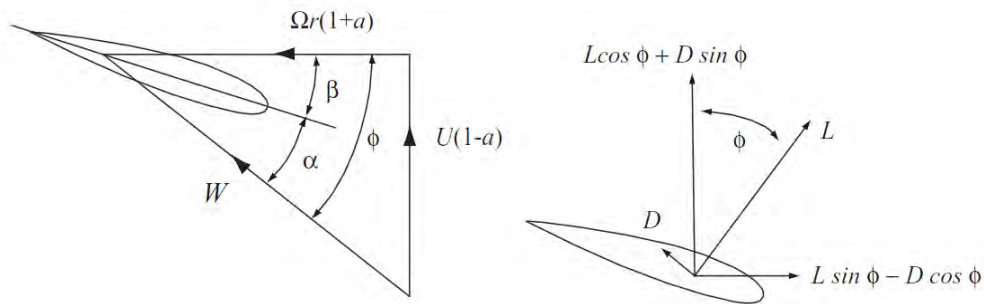


Figure 3. Blade Element Velocities and Forces.

If one considers the wake rotation, according to Fig. 2, where the angular velocity imparted to the flow stream is ω , while the angular velocity of the wind turbine rotor is Ω , then, across the flow disk, the angular velocity of the air relative to the blade increases from Ω to $\Omega + \omega$. One can prove that the tangential component of velocity is $\Omega r(1+a)$, according to Fig. 3. In Fig. 3, α is the angle of attack, ϕ is the angle of relative wind and β is the section pitch angle. Note that the angle of the relative wind is the sum of the section pitch angle and the angle of attack:

$$\phi = \beta + \alpha \quad (5)$$

Taking into account the lift force L and the drag force D , one can define the lift and the drag coefficients as:

$$C_l = \frac{L/l}{\frac{1}{2}\rho U^2 c} = \frac{\text{Lift force/unit length}}{\text{Dynamic force/unit length}} \quad (6)$$

$$C_d = \frac{D/l}{\frac{1}{2}\rho U^2 c} = \frac{\text{Drag force/unit length}}{\text{Dynamic force/unit length}} \quad (7)$$

From Fig. 3, one can determine the following relationships:

$$W = U(1-a)/\sin\phi \quad (8)$$

$$F_N = L\cos\phi + D\sin\phi \quad (9)$$

$$F_T = L\sin\phi - D\cos\phi \quad (10)$$

where W is the relative wind velocity, F_N is the normal force, and F_T is the tangential force to the disk.

If the rotor has B blades, the differential normal force on the section at the distance, r , from the centre is;

$$dF_N = B \frac{1}{2} \rho W^2 (C_l \cos\phi + C_d \sin\phi) c dr \quad (11)$$

The differential torque due to the tangential force operating at a distance r from the center is given by:

$$dQ = B \frac{1}{2} \rho W^2 (C_l \sin\phi - C_d \cos\phi) c r dr \quad (12)$$

Vinaud, F. J. and Menezes, J. C.
Blade design of a 100 kW wind turbine

The power coefficient can be calculated as a function of the tip speed ratio λ and the local speed ratio λ_r (Gash and Tvele, 2002):

$$C_p = \left(8/\lambda^2\right) \int_{\lambda_r}^{\lambda} \sin^2 \phi (\cos \phi - \lambda_r \sin \phi) (\sin \phi + \lambda_r \cos \phi) [1 - (C_d/C_l) \cot \phi] \lambda_r^2 d\lambda_r \quad (13)$$

where

$$\lambda = \frac{\Omega R}{U} \quad (14)$$

and

$$\lambda_r = \lambda r/R \quad (15)$$

One can perform the optimization of the blade shape for an ideal rotor by taking the partial derivative of C_p which is a function of ϕ , and setting it equal to zero, to reveal that:

$$\phi = (2/3) \tan^{-1}(1/\lambda_r) \quad (16)$$

$$c = \frac{8\pi r}{BC_l} (1 - \cos \phi) \quad (17)$$

Applying the Blade Element Theory (Manwell, 2002), the total wind turbine thrust and torque is obtained by summing the results of all the radial blade elements along the radial direction, that is:

$$\begin{aligned} T &= \sum_{i=1}^N \Delta T \\ Q &= \sum_{i=1}^N \Delta Q \end{aligned} \quad (18)$$

where N is the number of blade elements along the radial direction.

3. ITERATIVE SOLUTION PROCEDURE FOR BLADE ELEMENT THEORY

The iterative solution procedure for the Blade Element Theory is described below:

1) The method of solution for the blade element flow must start with some initial guess of R and λ .

2) Use these to find the flow angle on the blade according to Eq. (16), and then, use Eq. (17) to estimate the chord. Element thrust and torque are obtained from Eqs. (11) and (12) adapted to a finite radial length according to Eq. (18). Accordingly, the power coefficient can be estimated from Eq. (13). At this stage XFOIL is called to give C_d and C_l of the corresponding element.

3) With these approximated values of thrust and torque, Eqs. (16) and (17) can be used to give improved estimates of the flow angle and chord. This process can be repeated until values for ϕ and c have converged to within a specified tolerance. It should be noted that convergence for this nonlinear system of equations is not guaranteed. It is usually a simple matter of applying some convergence enhancing techniques (ie Crank-Nicholson under-relaxation) to get a result when linear airfoil section properties are used. When non-linear properties are used, including stall effects, then obtaining convergence will be significantly more difficult.

4) For the final values of ϕ and c , an accurate prediction of element thrust and torque will be obtained from equations (18).

4. NUMERICAL SIMULATIONS

The theory presented in the previous section was used to predict the aerodynamic performance of a 100 kW wind turbine. The wind turbine has three blades equally spaced along the circumferential direction. For the present work, the aerodynamic characteristic curves in terms of lift coefficient versus angle of attack and drag coefficient versus angle of attack of a NACA 24XX airfoil was taken into account. The airfoil thickness for this case has been varied from 35 % at the root to 15 % at the tip of the blade. The adopted criterion for choosing the best airfoil for the wind turbine blade is based on how much aerodynamic power the airfoil can effectively generate and transfer to the wind turbine shaft for a given operating condition. This quantity is measured by the power coefficient C_p which is defined by the ratio between aerodynamic power and wind power, (Gash and Twele, 2002). The turbine's aerodynamic performance was evaluated for each one of the three airfoils described previously using an in-house MatLab program based on the *Glauert Blade Element Theory* cited in section 2. For the studied case the same airfoil was used in all sections of the blade along the radius direction.

Table 1 presents values of the input data U and N , adopted for the numerical simulation. The same table also presents final values for C_p , R , T and Q . For the simulated case, the air properties were considered for sea level at 20°C .

Figure 4 shows the behavior of the blade chord along the blade radius direction. Figure 5 presents the variation of ϕ along the radius direction. In both figures, the chord c and the angle ϕ were normalized according to the maximum values. The present code also allows one to obtain the x and y coordinates of the blade sections after rotation. For example, the profiles of sections 96 sections are illustrated in Fig. 6. An illustrative picture of the blade appearance is presented in Fig. 7. For a variation of λ from 7 to 9 with steps of 0.5, Fig. 8 shows the behavior of C_p . Using a cubic spline interpolation it could be obtained that the maximum C_p is 0.4909 for $\lambda = 8,463$.

Table 1. Initial data and final results for a 100 kW wind turbine blade.

U	8.5 m/s
N	96
C_p	0.4909
R	13.95 m
T	$2.243 \times 10^4 \text{ N}$
Q	$2.201 \times 10^4 \text{ N.m}$

Vinaud, F. J. and Menezes, J. C.
Blade design of a 100 kW wind turbine

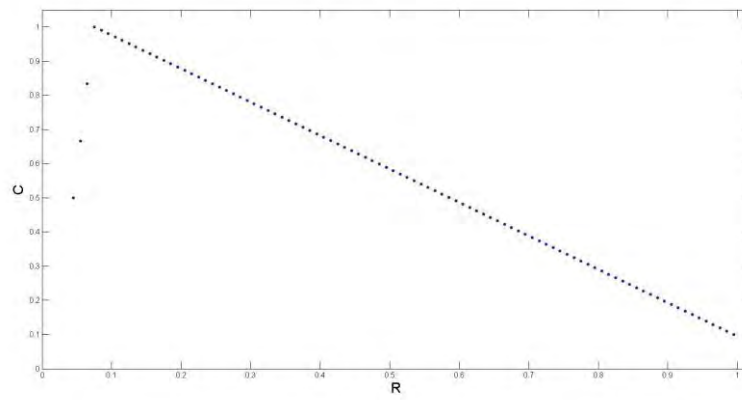


Figure 4: Blade chord C versus blade radius R .

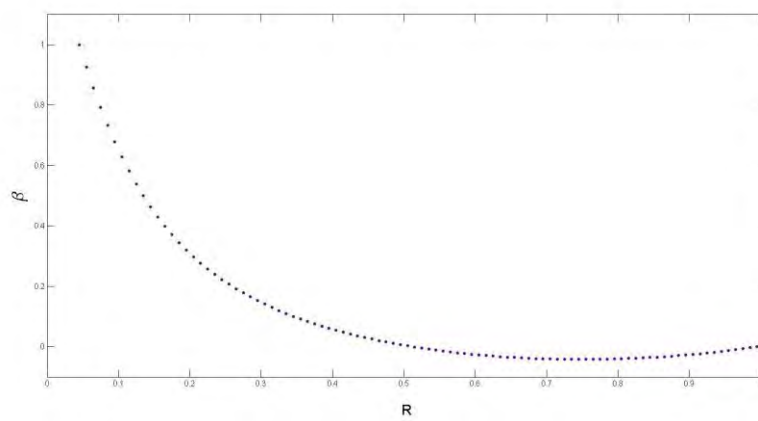


Figure 5: Section pitch angle β versus blade radius R .

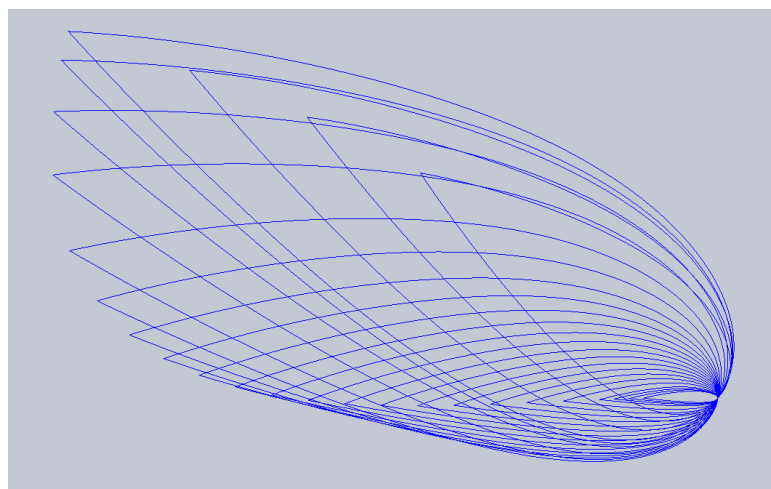


Figure 6. Illustration of the blade profiles for 96 sections.

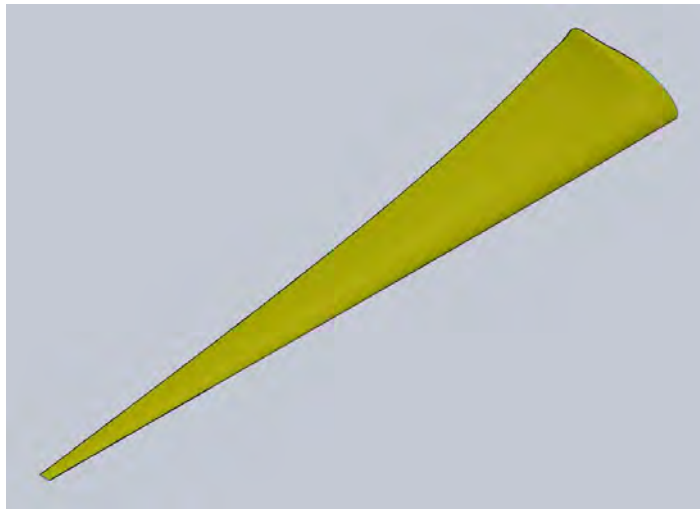


Figure 7. An illustrative picture of the blade appearance.

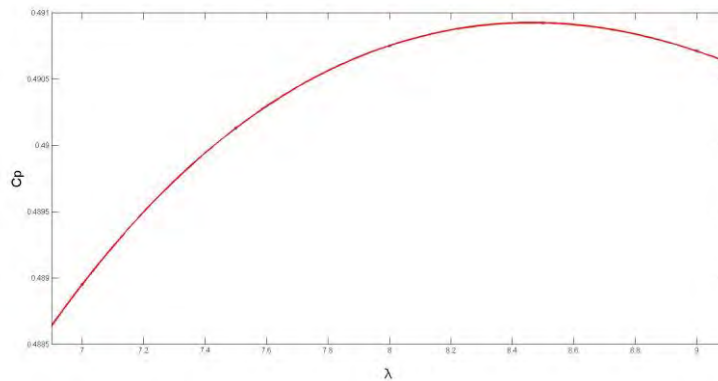


Figure 8. Blade chord along radius direction.

4. CONCLUSIONS

An aerodynamic model for wind turbines with variable geometry was presented and discussed in this work. Details about the numerical implementation were also presented and discussed. The proposed formulation is based on the Glauert Blade Element Theory which accounts for tip and rotational wake losses, which enables the prediction of torque, thrust and power coefficient for wind turbines with different airfoils geometries and subjected to a wide range of operating conditions. A study case in terms of aerodynamic performance was presented for a 100 kW wind turbine, in which a nominal velocity of 8.5 m/s was considered. The numerical predictions indicated a final radius R and a C_p value coherent with expected values for a 100 kW wind turbine blade. The same results may be compared with wind turbine blades, commercially adopted.

5. REFERENCES

- Burton, T., 2001, "Wind Energy Handbook", Ed. John Wiley and Sons Ltd., Chichester, New York, 624 p.
- do Nascimento, J.B., 1998, "Estudo aerodinâmico do efeito da rugosidade no desempenho de um modelo de turbina eólica de eixo horizontal", Tese de Doutorado, USP-São Carlos, Brazil, 131p.
- Donadon, M. V., Savanov, R., Menezes, J. C., Moreira Filho, L. A., "A Numerical Tool to Design Blades for horizontal Axis Wind Turbines with Variable Geometry" V National Congress of Mechanical Engineering, CONEM 2008, Salvador, Bahia, Brazil.
- Drela, M., 1989, "An analysis and design system for low reynolds number airfoils", Lecture Notes in Engineering 54.
- Gash, R. and Twele, J., 2002, "Wind Power Plants", Ed. James & James (Science Publishers) Ltd., London, UK, 390 p.

Vinaud, F. J. and Menezes, J. C.
Blade design of a 100 kW wind turbine

Hansen, M.O.L., 2001, "Aerodynamics of Wind Turbines : Rotors, Loads and Structure", Ed. James & James (Science Publishers) Ltd., London, UK, 152 p.

Loftin, L.K. and Bursnall, W.J., 1948, "*Effects of Variations in Reynolds Number between 3.0×10^6 and 25.0×10^6 Upon the Aerodynamic Characteristics of a Number of Naca Airfoil Sections*", NACA TN-1773, NASA Langley

Manwell, J. F., McGowan, J. G. and Rogers A. L., 2002. *Wind Energy Explained : Theory, Design and Application*. John Wiley & Sons, Ltd, England.

6. RESPONSIBILITY NOTICE

The author are the only responsible for the printed material included in this paper.