

DOUBLE-DIFFUSIVE NATURAL CONVECTION IN A POROUS CAVITY

Luzia A. Tofaneli¹

Marcelo J.S. De-Lemos²

Departamento de Energia - IEME

Instituto Tecnológico de Aeronáutica - ITA

12228-900 - São José dos Campos - SP, Brazil

¹ltofa@mec.ita.br

²delemos@ita.br

Abstract. This paper presents an analysis of the macroscopic heat and mass transport equations for laminar flow in permeable structures. Two driving mechanisms are considered to contribute to the overall momentum transport, namely temperature driven and concentration driven mass fluxes. Double-diffusive natural convection mechanism is investigated for the fluid phase in laminar regime. Results are presented for temperature and concentration fields as a function of number Darcy e buoyancy ratio.

Keywords: Natural Convection, Porous Media, Laminar Flow

1. Introduction

The study of double-diffusive natural convection in porous media has many environmental and industrial applications, including grain storage and drying, petrochemical processes, oil and gas extraction, contaminant dispersion in underground water reservoirs, electrochemical processes, etc (Bennacer et al, 2001, Goyeau et al, 1996, Mamou et al, 1995, Mamou et al, 1998) and (Mohamad and Bennacer, 2002). In some specific applications, the fluid mixture may become turbulent and difficulties arise in the proper mathematical modeling of the transport processes under both temperature and concentration gradients. Modeling of macroscopic transport for incompressible flows in rigid porous media has been based on the volume-average methodology for either heat (Hsu and Cheng, 1990) or mass transfer (Bear, 1972, Bear and Bachmat, 1967, Whitaker, 1966 and Whitaker, 1967).

If time fluctuations of the flow properties are considered, in addition to spatial deviations, there are two possible methodologies to follow in order to obtain macroscopic equations: a) application of time-average operator followed by volume-averaging (Kuwahara et al, 1996, Kuwahara and Nakayama, 1998), or b) use of volume-averaging before time-averaging is applied, (Lee and Howell, 1987). This work intends to present a set of macroscopic mass transport equations derived under the recently established double-decomposition concept (Pedras and de Lemos, 2000, Pedras and de Lemos, 2001, Pedras and de Lemos, 2001b, Pedras and de Lemos, 2001c), through which the connection between the two paths a) and b) above is unveiled. That methodology, initially developed for the flow variables, has been extended to heat transfer in porous media where both time fluctuations and spatial deviations were considered for velocity and temperature (Rocamora and de Lemos, 2000). Buoyant flows (de Lemos and Braga, 2003) and mass transfer (de Lemos and Mesquita, 2003) have also been investigated. Recently, a general classification of all proposed models for turbulent flow and heat transfer in porous media has been published (de Lemos and Pedras, 2001).

More recently, a full turbulence model for porous media including double-diffusion transport has been published (de Lemos and Tofaneli, 2004). As such, the present contribution intends to validate a developed numerical tool for applying such model, simulating here only laminar flow. Therefore, the study herein should be seen as a first step in order to validate a turbulence model for double-diffusive transport in porous media. Nevertheless, results herein showed good agreement with the literature, as presented below.

2. Local Instantaneous Transport Equation

The steady-state microscopic instantaneous transport equations for an incompressible binary fluid mixture with constant properties are given by:

$$\nabla \cdot \mathbf{u} = 0 \quad (1)$$

$$\rho \nabla \cdot (\mathbf{u} \mathbf{u}) = -\nabla p + \mu \nabla^2 \mathbf{u} + \rho \mathbf{g} \quad (2)$$

$$(\rho c_p) \nabla \cdot (\mathbf{u} T) = \nabla \cdot (\lambda \nabla T) \quad (3)$$

$$\rho \nabla \cdot (\mathbf{u} m_\ell + \mathbf{J}_\ell) = \rho R_\ell \quad (4)$$

where $\mathbf{u}$ is the mass-averaged velocity of the mixture, $\mathbf{u} = \sum_{\ell} m_{\ell} \mathbf{u}_{\ell}$, $\mathbf{u}_{\ell}$ is the velocity of species ℓ , m_{ℓ} is the mass fraction of component ℓ , defined as $m_{\ell} = \rho_{\ell} / \rho$, ρ_{ℓ} is the mass density of species ℓ (mass of ℓ over total mixture volume), ρ is the bulk density of the mixture ($\rho = \sum_{\ell} \rho_{\ell}$), p is the pressure, μ is the fluid mixture viscosity, $\mathbf{g}$ is the gravity acceleration vector, c_p is the specific heat, T is the temperature and λ is the fluid thermal conductivity. The generation rate of species ℓ per unit of mixture mass is given in (4) by R_{ℓ} .

An alternative way of writing the mass transport equation is using the volumetric molar concentration C_{ℓ} (mol of ℓ over total mixture volume), the molar weight M_{ℓ} (g/mol of ℓ) and the molar generation/destruction rate R_{ℓ}^* (mol of ℓ /total mixture volume), giving:

$$M_{\ell} \nabla \cdot (\mathbf{u} C_{\ell} + \mathbf{J}_{\ell}) = M_{\ell} R_{\ell}^* \quad (5)$$

Further, the mass diffusion flux J_{ℓ} (mass of ℓ per unit area per unit time) in (4) or (5) is due to the velocity slip of species ℓ ,

$$\mathbf{J} = \rho_{\ell} (\mathbf{u}_{\ell} - \mathbf{u}) = -\rho_{\ell} D_{\ell} \nabla m_{\ell} = -M_{\ell} D_{\ell} \nabla C_{\ell} \quad (6)$$

where D_{ℓ} is the diffusion coefficient of species ℓ into the mixture. The second equality in Eq. (6) is known as Fick's Law, which is a constitutive equation strictly valid for binary mixtures under the absence of any additional driving mechanisms for mass transfer (Hsu and Cheng, 1990). Therefore, no Soret or Dufour effects are here considered.

Rearranging (5) for an inert species, dividing it by M_{ℓ} and dropping the index ℓ for a simple binary mixture, one has,

$$\nabla \cdot (\mathbf{u} C) = \nabla \cdot (D \nabla C) \quad (7)$$

If one considers that the density in the last term of (2) varies with temperature and concentration, for natural convection flow, the Boussinesq hypothesis reads, after renaming this density ρ_T ,

$$\rho_T \cong \rho [1 - \beta(T - T_{ref}) - \beta_C(C - C_{ref})] \quad (8)$$

where the subscript ref indicates a reference value and β and β_C are the thermal and salute expansion coefficients, respectively, defined by,

$$\beta = -\frac{1}{\rho} \frac{\partial \rho}{\partial T} \bigg|_{p,C}, \quad \beta_C = -\frac{1}{\rho} \frac{\partial \rho}{\partial C} \bigg|_{p,T} \quad (9)$$

Equation (8) is an approximation of (9) and shows how density varies with temperature and concentration in the body force term of the momentum equation.

Further, substituting (8) into (2), one has,

$$\rho \nabla \cdot (\mathbf{u} \mathbf{u}) = -\nabla p + \mu \nabla^2 \mathbf{u} + \rho \mathbf{g} [1 - \beta(T - T_{ref}) - \beta_C(C - C_{ref})] \quad (10)$$

Thus, the momentum equation becomes,

$$\rho \nabla \cdot (\mathbf{u} \mathbf{u}) = -(\nabla p)^* + \mu \nabla^2 \mathbf{u} - \rho \mathbf{g} [\beta(T - T_{ref}) + \beta_C(C - C_{ref})] \quad (11)$$

where $(\nabla p)^* = \nabla p - \rho \mathbf{g}$ is a modified pressure gradient.

As mentioned, there are, in principle, two ways that one can follow in order to treat turbulent flow in porous media. The first method applies a time average operator to the governing Eq. (4) before the volume average procedure is conducted. In the second approach, the order of application of the two average operators is reversed. Both techniques aim at derivation of a suitable macroscopic turbulent mass transport equation.

Volume averaging in a porous medium, described in detail in references (Gray and Lee, 1997) and (Whitaker, 1969), makes use of the concept of a Representative Elementary Volume (REV), over which local equations are integrated. After integration, detailed information within the volume is lost and, instead, overall properties referring to a REV are considered. In a similar manner, statistical analysis of turbulent flow leads to time mean properties. Transport equations for statistical values are considered in lieu of instantaneous information on the flow.

Before undertaking the task of developing macroscopic equations, it is convenient to recall the definition of time average and volume average.

2.1. Volume Average Operator

The volume average of ϕ taken over a Representative Elementary Volume in a porous medium can be written as:

$$\langle \phi \rangle^v = \frac{1}{\Delta V} \int_{\Delta V} \phi dV \quad (12)$$

The value $\langle \phi \rangle^v$ is defined for any point x surrounded by a Representative Elementary Volume, of size ΔV . This average is related to the intrinsic average for the fluid phase as:

$$\langle \phi_f \rangle^v = \phi \langle \phi_f \rangle^i \quad (13)$$

where $\phi = \Delta V_f / \Delta V$ is the medium porosity and ΔV_f is the volume occupied by the fluid in a REV. Furthermore, one can write:

$$\phi = \langle \phi \rangle^i + {}^i\phi \quad (14)$$

with $\langle {}^i\phi \rangle^i = 0$. In Eq. (14), ${}^i\phi$ is the spatial deviation of ϕ with respect to the intrinsic average $\langle \phi \rangle^i$.

Further, the local volume average theorem can be expressed as (Gray and Lee, 1997) and (Whitaker, 1969):

$$\begin{aligned} \langle \nabla \phi \rangle^v &= \nabla (\phi \langle \phi_f \rangle^i) + \frac{1}{\Delta V} \int_{A_i} \mathbf{n} \phi dS \\ \langle \nabla \cdot \phi \rangle^v &= \nabla \cdot (\phi \langle \phi_f \rangle^i) + \frac{1}{\Delta V} \int_{A_i} \mathbf{n} \cdot \phi dS \\ \left\langle \frac{\partial \phi}{\partial t} \right\rangle^v &= \frac{\partial}{\partial t} (\phi \langle \phi_f \rangle^i) - \frac{1}{\Delta V} \int_{A_i} \mathbf{n} \cdot (\mathbf{u}_i \phi) dS \end{aligned} \quad (15)$$

where $\mathbf{n}$ is the unit vector normal to the fluid-solid interface and A_i is the fluid-solid interface area within the REV. It is important to emphasize that A_i should not be confused with the surface area surrounding volume ΔV .

2.2. Macroscopic Equations for Buoyancy Free Flows

Momentum transport

$$\rho \nabla \cdot \left(\frac{\mathbf{u}_D \mathbf{u}_D}{\phi} \right) = -\nabla (\phi \langle p \rangle^i) + \mu \nabla^2 \mathbf{u}_D - \left[\frac{\mu \phi}{K} \mathbf{u}_D + \frac{c_F \phi \rho |\mathbf{u}_D| \mathbf{u}_D}{\sqrt{K}} \right] \quad (16)$$

Heat transport

$$(\rho c_p)_f \nabla \cdot (\mathbf{u}_D \langle T \rangle^i) = \nabla \cdot \{ \mathbf{K}_{eff} \cdot \nabla \langle T \rangle^i \} \quad (17)$$

$$\mathbf{K}_{eff} = [\phi \lambda_f + (1 - \phi) \lambda_s] \mathbf{I} + \mathbf{K}_{tor} + \mathbf{K}_{disp} \quad (18)$$

The subscripts f and s refer to fluid and solid phases, respectively, and coefficients K's come from the modeling of the following mechanisms:

- Tortuosity:
$$\left[\frac{1}{\Delta V} \int_{A_i} \mathbf{n} (\lambda_f T_f - \lambda_s T_s) dS \right] = \mathbf{K}_{tor} \cdot \nabla \langle T \rangle^i \quad (19)$$

- Thermal dispersion:
$$-(\rho c_p)_f \phi \langle \mathbf{u}^i T_f \rangle^i = \mathbf{K}_{disp} \cdot \nabla \langle T \rangle^i \quad (20)$$

Mass transport

$$\nabla \cdot (\mathbf{u}_D \langle C \rangle^i) = \nabla \cdot \mathbf{D}_{eff} \cdot \nabla (\phi \langle C \rangle^i) \quad (21)$$

$$\mathbf{D}_{eff} = \mathbf{D}_{disp} + \mathbf{D}_{diff} \quad (22)$$

$$\mathbf{D}_{diff} = \langle D \rangle^i \mathbf{I} = \frac{1}{\rho} \frac{\mu_\phi}{Sc} \mathbf{I} \quad (23)$$

The coefficients $\mathbf{D}_{disp}$ in (21) appear due to the nonlinearity of the convection term. They come from the modeling of the following mechanisms:

- Mass dispersion:
$$-\langle \mathbf{u}^i C \rangle^i = \mathbf{D}_{disp} \cdot \nabla \langle C \rangle^i \quad (24)$$

where here we do not account for the thermal and mass dispersion effects, taking in to account only the diffusive and convective ones. Thus, $\mathbf{K}_{tor}$, $\mathbf{K}_{disp}$ and $\mathbf{D}_{disp}$ are null.

2.3. Macroscopic double-diffusion Effects

Mean Flow

Focusing now attention to buoyancy effects only, application of the volume average procedure to the last term of (11) leads to,

$$\langle \rho \mathbf{g} [\beta(T - T_{ref}) + \beta_C (C - C_{ref})] \rangle^v = \frac{\Delta V_f}{\Delta V} \frac{1}{\Delta V_f} \int_{\Delta V_f} \rho \mathbf{g} [\beta(T - T_{ref}) + \beta_C (C - C_{ref})] dV \quad (25)$$

Expanding the left hand side of (25) in light of (14), the buoyancy term becomes,

$$\begin{aligned} & \langle \rho \mathbf{g} [\beta(T - T_{ref}) + \beta_C (C - C_{ref})] \rangle^v \\ &= \rho \mathbf{g} \phi [\beta_\phi \langle T \rangle^i - T_{ref}) + \beta_{C_\phi} (\langle C \rangle^i - C_{ref})] + \underbrace{\rho \mathbf{g} \beta_\phi \langle T \rangle^i}_{=0} + \underbrace{\rho \mathbf{g} \beta_{C_\phi} \langle C \rangle^i}_{=0} \end{aligned} \quad (26)$$

where the third and forth terms on the r.h.s. are null since $\langle \mathbf{u}^i \phi \rangle^i = 0$. Here, coefficients β_ϕ and β_{C_ϕ} are the macroscopic thermal and salute expansion coefficients, respectively. Assuming that gravity is constant over the REV, expressions for them based on (26) are given as,

$$\beta_\phi = \frac{\langle \rho \beta (T - T_{ref}) \rangle^v}{\rho \phi (\langle T \rangle^i - T_{ref})}; \quad \beta_{C_\phi} = \frac{\langle \rho \beta_C (C - C_{ref}) \rangle^v}{\rho \phi (\langle C \rangle^i - C_{ref})} \quad (27)$$

Including (26) into (16), the macroscopic time-mean Navier-Stokes (NS) equation for an incompressible fluid with constant properties is given as,

$$\rho \nabla \cdot \left(\frac{\mathbf{u}_D \mathbf{u}_D}{\phi} \right) = -\nabla(\phi \langle p \rangle^i) + \mu \nabla^2 \mathbf{u}_D + \rho \mathbf{g} \phi [\beta_\phi (\langle T \rangle^i - T_{ref}) + \beta_{C_\phi} (\langle C \rangle^i - C_{ref})] - \left[\frac{\mu \phi}{K} \mathbf{u}_D + \frac{c_F \phi \rho |\mathbf{u}_D| \mathbf{u}_D}{\sqrt{K}} \right] \quad (28)$$

3. Results and Discussion

The presents work refers to the study of natural convective flows in a porous cavity (height H , width L , aspect ratio $A = H/L$), saturated by a binary fluid (such as aqueous solutions, as in numerous experimental studies related to solidification processes). Horizontal temperature and concentration differences are specified between the vertical walls (T_1 and C_1 at the left wall, T_2 and C_2 at the right wall), and zero mass and heat fluxes are imposed at the horizontal wall. All boundaries are impermeable. The binary fluid is assumed to be Newtonian and to satisfy the Boussinesq approximation. The flow is incompressible, laminar, 2D and the steady state is considered.

In this work, equations were derived for laminar double-diffusive natural convection in porous media. Extra terms appearing in the equations needed to be modeled in terms of u_D , $\langle T \rangle$ and $\langle C \rangle$.

The numbers: Lewis, Nusselt, Prandtl, Rayleigh, Schmidt, thermal Grashof, solutal Grashof, Darcy and buoyancy ratio are given as,

$$Le = Sc / Pr, \quad Nu = \frac{h.H}{\alpha}, \quad Pr = \nu / \alpha, \quad Ra^* = Gr_T \cdot Pr \cdot Da, \quad Sc = \nu / D, \quad Gr_T = \frac{g \beta_T \Delta T H^3}{\nu^2}, \quad Gr_C = \frac{g \beta_C \Delta C H^3}{\nu^2},$$

$$Da = K / H^2, \quad N = Gr_C / Gr_T$$

Figures 1 and 2 show the corresponding fields for $N = 0$, $Ra^* = 100$ and $Le = 10$, with $Da = 10^{-7}$ and $Da = 10^{-3}$, respectively. It's clearly seen from Figs 1 and 2 that the streamlines show thicker dynamic boundary layers when high Darcy numbers are considered, and consequently, the concentration gradients at the wall are smaller. The concentration field shows a classical stratified structure for flows within cavities. However, the isotherms show a non-stratified behavior for the temperature field.

Figures 3 to 6 show the fields for different values of N ($Ra^* = 100$, $Le = 100$, $Da = 10^{-7}$). One can note from the streamlines behavior that the structure of the flow changes significantly as N increases. According to Goyeau et al, 1996, for lower values of N , the whole enclosure is affected by the flow and a boundary layer regime progressively appears with larger values of N . Further, the figures indicate that changes of these flow structures have also a direct consequence on the concentration field. Therefore, results herein are in agreement with Goyeau et al, 1996, indicating correctness of the computer code developed.

Table 1 further presents calculated values for average Nusselt and Sherwood numbers, which are compared with those obtained by Trevisan and Bejan, 1985, and Goyeau et al, 1996, also showing good agreement.

4. Conslusions

The presented numerical results were compared with those found in the literature and seem to indicate that qualitatively good agreement was obtained. As such, this work was a first step towards applying the model proposed by de Lemos and Tofaneli, 2004, which considers turbulent double-diffusive transport in porous media.

Future steps in this research program shall simulate fully turbulent regime in porous cavities.

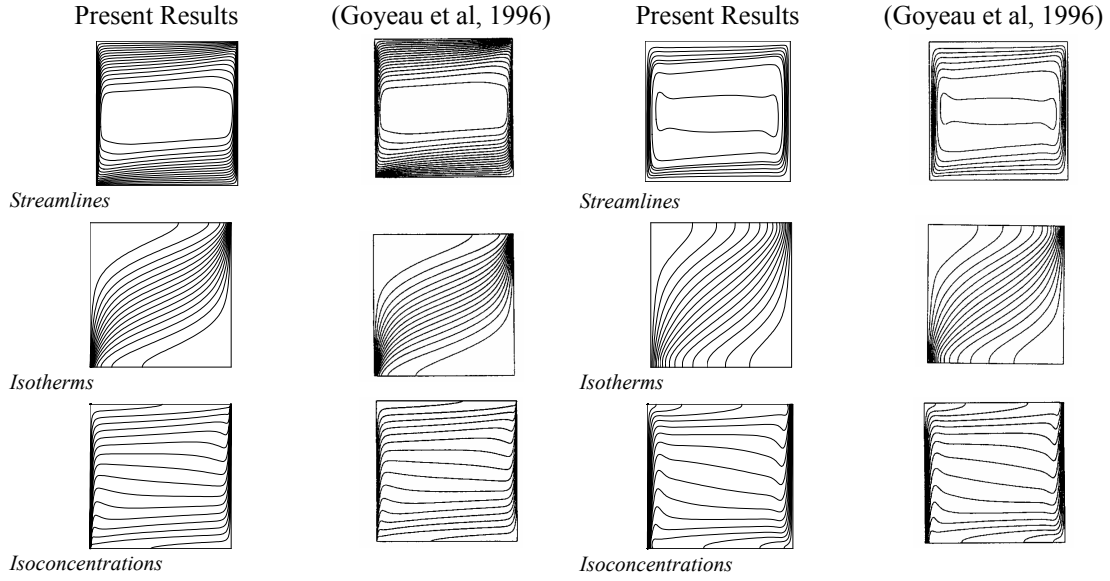


Figure 1 – Streamlines, isotherms and isoconcentration lines ($Ra^* = 100$; $Le = 10$; $A = 1$, $Da = 10^{-7}$).

Figure 2 – Streamlines, isotherms and isoconcentration lines ($Ra^* = 100$; $Le = 10$; $A = 1$, $Da = 10^{-3}$).

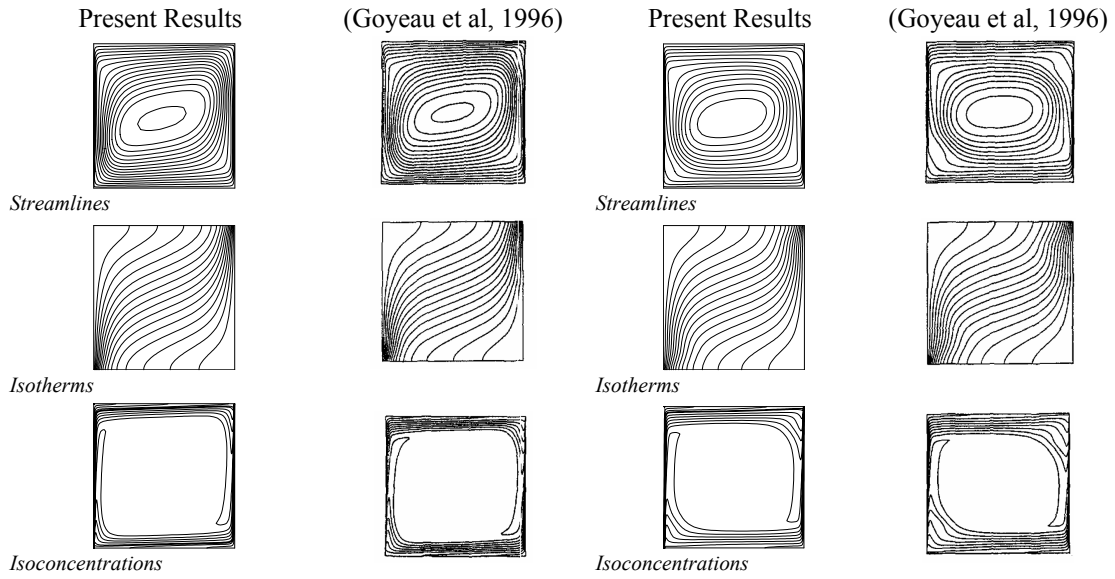


Figure 3– Streamlines, isotherms and isoconcentration lines ($N = 2$; $Ra^* = 100$; $Le = 100$; $A = 1$, $Da = 10^{-7}$).

Figure 4– Streamlines, isotherms and isoconcentration lines ($N = 3$; $Ra^* = 100$; $Le = 100$; $A = 1$, $Da = 10^{-7}$).

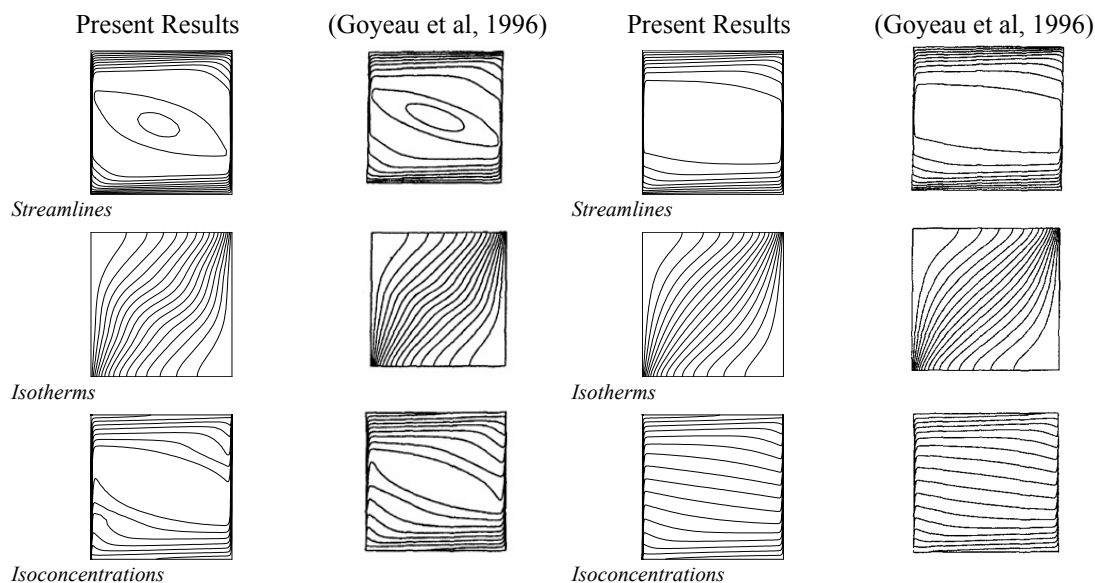


Figure 5 – Streamlines, isotherms and isoconcentration lines ($N = 5$; $Ra^* = 100$; $Le = 100$; $A = 1$, $Da = 10^{-7}$).

Figure 6– Streamlines, isotherms and isoconcentration lines ($N = 10$, $Ra^* = 100$; $Le = 100$; $A = 1$, $Da = 10^{-7}$).

Table 1: Average Nusselt and Sherwood numbers ($N=0$ only thermal drive, $Le=10$, $A=1$).

Ra^*		100	200	400	1.000	2.000
Nu	Present Results	3.11	4.90	7.65	13.22	19.54
	Goyeau et al, 1996	3.11	4.96	7.77	13.47	19.90
	Trevisan and Bejan, 1985	3.27	5.61	9.69	-	-
Sh	Present Results	14.76	22.02	32.55	53.37	76.58
	Goyeau et al, 1996	13.25	19.86	28.41	48.32	69.29
	Trevisan and Bejan, 1985	15.61	23.23	30.76	-	-

5. Acknowledgement

Both authors are thankful to CNPq and FAPESP, Brazil, for their invaluable financial support during the preparation of this work.

6. References

- Bear, J., 1972, "Dynamics of Fluids in Porous Media", Dover, New York.
- Bear, J. and Bachmat, Y., 1967, "A generalized theory on hydrodynamic dispersion in porous media", I.A.S.H. Symp. Artificial Recharge and Management of Aquifers, Haifa, Israel, P.N. 72, I.A.S.H., pp. 7-16.
- Bennacer, R., Tobbal, A., Beji, H. and Vasseur, P., 2001, "Double diffusive convection in a vertical enclosure filled with anisotropic porous media", International Journal of Thermal Sciences, Vol.40, N°1, pp.30-41.
- Bennacer, R., Beji, H. and Mohamad, A.A., 2003, "Double diffusive convection in a vertical enclosure inserted with two saturated porous layers confining a fluid layer", International Journal of Thermal Sciences, Vol.42, N°2, pp.141-151.
- de Lemos, M.J.S. and Braga, E.J., 2003, "Modeling of turbulent natural convection in porous media", International Communications Heat Mass Transfer, Vol.30, N°5, pp.615 - 624.

- de Lemos, M.J.S. and Mesquita, M.S., 2003, "Turbulent mass transport in saturated rigid porous media", *International Communications Heat Mass Transfer*, Vol.30, pp.105 - 113.
- de Lemos, M.J.S. and Pedras, M.H.J., 2001, "Recent mathematical models for turbulent flow in saturated rigid porous media", *Journal of Fluids Engineering*, Vol.123, N°.4, pp. 935 - 940.
- de Lemos, M.J.S., Tofaneli, L.A., Modeling of Double-Diffusive Turbulent Natural Convection in Porous Media, *International Journal of Heat Mass Transfer*, 47(19-20), (2004) 4221-4231.
- Goyeau, B., Songbe, J.P. and Gobin, D., 1996, "Numerical study of double-diffusive natural convection in a porous cavity using the Darcy-Brinkman formulation", *International Journal of Heat and Mass Transfer*, Vol.39, N°.7, pp.1363-1378.
- Gray, W.G. and Lee, P.C.Y., 1997, "On the theorems for local volume averaging of multiphase system", *Int. J. Multiphase Flow*, Vol.3, pp.333 -340.
- Hsu, C.T. and Cheng, P., 1990, "Thermal dispersion in a porous medium", *International Journal Heat Mass Transfer*, Vol.33, pp.1587-1597.
- Kuwahara, F., Nakayama, A. and Koyama, H., 1996, "A numerical study of thermal dispersion in porous media", *Journal of Heat Transfer*, Vol.118, pp.756.
- Kuwahara, F. and Nakayama, A., 1998, "Numerical modeling of non-Darcy convective flow in a porous medium", *Heat Transfer 1998: Proc. 11th Int. Heat Transf. Conf.*, Kyongyu, Korea, Vol.4, pp.411-416, Taylor & Francis Washington, D.C..
- Lee, K. and Howell, J.R., 1987, "Forced convective and radiative transfer within a highly porous layer exposed to a turbulent external flow field", *Proceedings of the 1987 ASME-JSME Thermal Engineering Joint Conf.*, Honolulu, Hawaii, Vol.2, pp.377-386, ASME, New York, N.Y..
- Mamou, M., Vasseur, P. and Bilgen, E., 1995, "Multiple solutions for double-diffusive convection in a vertical porous enclosure", *International Journal of Heat and Mass Transfer*, Vol.38, N°.10, pp.1787-1798.
- Mamou, M., Hasnaoui, M., Amahmid, A. and Vasseur, P., 1998, "Stability analysis of double diffusive convection in a vertical brinkman porous enclosure", *International Communications in Heat and Mass Transfer*, Vol.25, N°.4, pp.491-500.
- Mohamad, A.A. and Bennacer, R., 2002, "Double diffusion natural convection in an enclosure filled with saturated porous medium subjected to cross gradients; stably stratified fluid", *International Journal of Heat and Mass Transfer*, Vol.45, N°.18, pp.3725-3740.
- Nithiarasu, P., Sundararajan, T., Seetharamu, K.N., 1997, "Double-diffusive natural convection in a fluid saturated porous cavity with a freely convecting wall", *International Communications in Heat and Mass Transfer*, Vol.24, N°.8, pp.1121-1130.
- Pedras, M.H.J. and de Lemos, M.J.S., 2000, "On the definition of turbulent kinetic energy for flow in porous media", *International Communications Heat and Mass Transfer*, Vol.27, N°.2, pp. 211 - 220.
- Pedras, M.H.J. and de Lemos, M.J.S., 2001, "Macroscopic turbulence modeling for incompressible flow through undeformable porous media", *International Journal Heat and Mass Transfer*, Vol.44, N°.6, pp.1081 - 1093.
- Pedras, M.H.J. and de Lemos, M.J.S., 2001, "Simulation of turbulent flow in porous media using a spatially periodic array and a lowre two-equation closure", *Numerical Heat Transfer - Part A Applications*, Vol.39, N°.1, pp. 35.
- Pedras, M.H.J. and de Lemos, M.J.S., 2001, "On the mathematical description and simulation of turbulent flow in a porous medium formed by an array of elliptic rods", *Journal of Fluids Engineering*, Vol.23, N°.4, pp. 941 - 947.
- Rocamora Jr., F.D. and de Lemos, M.J.S., 2000, "Analysis of convective heat transfer for turbulent flow in saturated porous media", *International Communications Heat and Mass Transfer*, Vol.27, N°.6, pp. 825 - 834.
- Slattery, J.V., 1967, "Flow of viscoelastic fluids through porous media", *A.I.Ch.E. J.*, Vol.13, pp.1066 - 1071.
- Trevisan, O. and Bejan, A., 1985, "Natural convection with combined heat and mass transfer buoyancy effects in a porous medium", *International Journal Heat and Mass Transfer*, Vol.28, pp.1597-1611.
- Whitaker, S., 1966, "Equations of motion in porous media", *Chem. Eng. Sci.*, Vol.21, pp.91.
- Whitaker, S., 1967, "Diffusion and dispersion in porous media", *J. Amer. Inst. Chem. Eng.*, Vol.3, N°.13, pp.420.
- Whitaker, S., 1969, "Advances in theory of fluid motion in porous media", *Indust. Eng. Chem.*, Vol.61, pp.14 - 28.