

AN OBJECTIVE EXPLICIT FORMULATION BASED ON THE OLDROYD-B DIFFERENTIAL CONSTITUTIVE EQUATION

Gilmar Mompean

Laboratoire de Mécanique de Lille, Université des Sciences et Technologies de Lille, EUDIL.
Cité Scientifique, 59655. Villeneuve d'Ascq Cedex, France.
Gilmar.Mompean@eudil.fr

Roney Leon Thompson

Department Mechanical Engineering, Pontifícia Universidade Católica do Rio de Janeiro.
Rua Marquês de São Vicente, 225. Gávea, Rio de Janeiro, 22453-900, Brazil.
roney@mec.puc-rio.br

Paulo Roberto de Souza Mendes

Department Mechanical Engineering, Pontifícia Universidade Católica do Rio de Janeiro.
Rua Marquês de São Vicente, 225. Gávea, Rio de Janeiro, 22453-900, Brazil.
pmendes@mec.puc-rio.br

Abstract. *In the present paper is shown how to obtain an objective explicit algebraic extra-stress model (AESM) based on differential constitutive equations for viscoelastic flows (Oldroyd B, White-Metzner, Phan-Thien-Tanner, etc). The formulation is developed for three-dimensional time-dependent flows. In a previous work, Mompean et al., 1998 obtained a non-objective algebraic model. This inconsistency is now removed introducing the relative-rate-of-rotation tensor making the model frame-invariant. A new generalized objective time derivative is also introduced, giving flexibility to the model. Calculations are performed with an Oldroyd B based AESM for a 4:1 contraction flow, showing good agreement with the original constitutive differential model. Several results with particular derivatives are obtained and an analysis guided by a flow type classifier is given. This formulation is able to include a prediction, not present in the Oldroyd B model, the viscometric second normal stress difference, N_2 .*

Keywords: *viscoelastic fluid, constitutive model, relative-rate-of-rotation tensor, generalized objective time derivative*

1. Introduction

Numerical prediction of viscoelastic fluids flowing through three-dimensional (3D) complex geometries is an area of great interest, encompassing industrial and scientific applications. Viscoelastic liquids are commonly found in the industries of plastics, food, paints, petroleum, to name a few. In these industrial applications, viscoelastic liquids not rarely flow through complex three-dimensional geometric configurations, and their viscoelastic nature often requires multi-mode constitutive models to truthfully represent their mechanical behavior. Examples where time-dependent effects are present also abound in industrial processes.

A great challenge while performing numerical simulations of these flows is to solve the mass and momentum conservation equations in conjunction with a constitutive equation for stress. The resulting system of equations is a mathematical description of a physical problem which involves complex phenomena and effects, such as elasticity, inertia and diffusion. For example, in the case of a three-dimensional flow of a viscoelastic fluid described by any differential single-mode constitutive model, the task is to solve ten coupled differential equations (namely, six for the extra-stress tensor, three for momentum conservation, and one for mass conservation).

This number can increase rapidly for multimode fluid models Baaijens, 1993. The computing time and the storage memory are important parameters that can reach huge values for 3D numerical simulation of multimode viscoelastic fluids. Even with the use of powerful modern computers and the most efficient algorithms, performing such simulations still constitutes a formidable task. Due to this reason, the quest for simplified viscoelastic models for numerical simulations has become an important area of research in the last years. The use of the algebraic extra-stress model (AESM) formulation (Mompean et al., 1998) goes in this direction.

The aim of the present study is to propose a method for obtaining objective explicit algebraic extra-stress models starting from any differential constitutive equation, such as, for example, the Upper-Convected Maxwell, Oldroyd-B, White-Metzner and Phan-Thien-Tanner models. The procedure is based on the transformation of the constitutive equation into an algebraic objective model, while keeping its elasticity prediction capability. One differential equation only has to be solved, namely, for the trace of the extra-stress tensor.

Inspired in the analogy between viscoelastic fluids and turbulence modelling mentioned by Rivlin, 1957, this approach was recently applied to flows of viscoelastic liquids by Mompean et al., 1998 and Mompean, 2001, to obtain constitutive models via polynomial base expansions (Pope, 1975). The approach is interesting because it keeps the capability of predicting viscoelasticity effects. However, the models proposed in these recent works are not objective, because the vorticity tensor \mathbf{W} has been used as a base to develop the polynomial expansion.

Objectivity is attained in the present work by modifying a previously used hypothesis for the advection of extra-stress. In this connection, two new kinematic tensors (see Astarita, 1979) are needed, namely (i) $\mathbf{\Omega}$, the rate of rotation of the principal directions of \mathbf{S} , the rate-of-deformation tensor and (ii) $\overline{\mathbf{W}} = \mathbf{W} - \mathbf{\Omega}$. The relative-rate-of-rotation tensor, $\overline{\mathbf{W}}$, is objective and measures the rate of rotation of a material particle as seen by an observer which is fixed to the principal axes of \mathbf{S} . Inspired in the early work by Schunk and Scriven, 1990, Souza Mendes et al., 1995, and later Thompson et al., 1999 employed $\overline{\mathbf{W}}$ to produce algebraic constitutive models which predict rheological material functions for stationary flow, but are not capable of predicting transient elasticity effects.

Flows of non-Newtonian viscoelastic fluids flowing inside or around complex geometries having singularities also rather difficult to simulate numerically. For this reason, the flow through abrupt planar or axisymmetric contractions is often employed as a test flow for numerical simulations in the field of non-Newtonian fluid mechanics, and will also be used here to study the present formulation. Even for the Newtonian case, the flow originated by this geometry is complex in a sense that the fluid is submitted to a mix of shear, extension and solid body motion. The singularity present in the sharp corner of this geometry is responsible for many difficulties that arise in numerical simulations of viscoelastic flows. The strong gradient near the singularity for pressure and extra-stress components can introduce numerical errors.

In the present study we present solutions for the 2D flow through a planar contraction, using the model described later in this paper. The paper is organized as follows. In Section 2 the conservation equations are presented. The objective algebraic extra-stress model strategy is introduced in Section 3 and applied to the Oldroyd-B model. The finite volume numerical method used to discretize the equations is discussed in Section 4. Numerical results for the flow through the 4:1 contraction are presented in Section 5, together with a discussion of some important features of the proposed model. Finally, the conclusions are given in Section 6.

2. Governing equations

The mass and momentum conservation equations coupled with the constitutive relation for the extra-stress components of an Oldroyd-B fluid are considered in this section. The velocity field (\mathbf{v}) as well as the independent variables are non-dimensionalised using a characteristic velocity scale U and length scale L are taken as the average velocity in the downstream half channel and the width of the downstream half channel (H), respectively (see Fig. 5.1). The pressure (p), and extra-stress ($\boldsymbol{\tau}$) variables are scaled with η^*U/L . The viscosity η^* will be equal to the sum of the Newtonian viscosity η_0^* and the polymeric viscosity η_1^* , then the Reynolds number is defined as $Re = \rho UL/\eta^*$, where ρ is the density. The viscosities are non-dimensionalised as $\eta_i = \eta_i^*/\eta^*$, $i = 0, 1$. The Deborah number is given by $De = \lambda\dot{\gamma}$, where λ is the relaxation time of the viscoelastic fluid, and $\dot{\gamma} = U/L$ is the characteristic shear rate in the downstream channel for the contraction flow.

(i) mass conservation:

$$\nabla \cdot \mathbf{v} = 0, \quad (1)$$

(ii) momentum conservation:

$$Re \frac{D\mathbf{v}}{Dt} = \nabla \cdot (-p\mathbf{I} + 2\eta_0\mathbf{S} + \boldsymbol{\tau}), \quad (2)$$

(iii) Oldroyd-B constitutive equation:

$$\boldsymbol{\tau} + De \left(\frac{D\boldsymbol{\tau}}{Dt} - \nabla \mathbf{v}^T \boldsymbol{\tau} - \boldsymbol{\tau} \nabla \mathbf{v} \right) = 2\eta_1\mathbf{S}, \quad (3)$$

where D/Dt is the material derivative, \mathbf{I} the identity tensor, and \mathbf{S} the (symmetric) rate of deformation tensor. The deformation rate tensor is defined as:

$$\mathbf{S} = \frac{1}{2} (\nabla \mathbf{v} + \nabla \mathbf{v}^T), \quad (4)$$

where the following definition has been used for the velocity gradient $\nabla \mathbf{v} = \mathbf{grad}_{ij} = \partial u_j / \partial x_i$, and $\nabla \mathbf{v}^T$ is the transpose.

3. Objective algebraic extra-stress formulation

This section is divided in three sub-sections. In the first one, the general equations and the hypothesis to obtain the algebraic extra-stress model are presented and applied to the Oldroyd-B model. In the second section, a way of including the second normal stress difference for pure shear flows, N_2 to the model is shown. In the third, a classifier sensitive to the type of the flow (shear, extension and solid body motion) is analyzed.

3.1. General equations

The constitutive equation (3) for the viscoelastic model can be rewritten in terms of the kinematic tensors \mathbf{S} and \mathbf{W} , where \mathbf{W} is the vorticity tensor (skew-symmetric) defined as:

$$\mathbf{W} = \frac{1}{2} (\nabla \mathbf{v} - \nabla \mathbf{v}^T). \quad (5)$$

It is convenient to put in this form in order to work with the tensor polynomial expansion basis. This is done straightforward by replacing the velocity gradient by $\nabla \mathbf{v} = \mathbf{S} + \mathbf{W}$, and its transpose by $\nabla \mathbf{v}^T = \mathbf{S} - \mathbf{W}$. The equation (3) is now rewritten using \mathbf{S} and \mathbf{W} as:

$$\frac{D\boldsymbol{\tau}}{Dt} = -\frac{1}{De}\boldsymbol{\tau} + \frac{2\eta_1}{De}\mathbf{S} + (\mathbf{S}\boldsymbol{\tau} + \boldsymbol{\tau}\mathbf{S}) - (\mathbf{W}\boldsymbol{\tau} - \boldsymbol{\tau}\mathbf{W}). \quad (6)$$

In order to develop an explicit algebraic extra-stress model using the kinematic tensors \mathbf{S} and \mathbf{W} , (Rivlin and Ericksen, 1955) have shown that a linear relation can be obtained between a depend tensor and a finite number of others tensors (basis tensors) formed from the elements of the kinematic tensors \mathbf{S} and \mathbf{W} (the independent tensors). Following (Rivlin and Ericksen, 1955), we have to work with a traceless matrix, in this way the extra-stress traceless tensor $\boldsymbol{\Gamma}$ is introduced and defined as:

$$\boldsymbol{\Gamma} = \boldsymbol{\tau} - \frac{I_\tau}{3}\mathbf{I}, \quad (7)$$

where $I_\tau = \{\boldsymbol{\tau}\}$ is the first invariant (the trace) of the tensor $\boldsymbol{\tau}$. Then Eq. (6) can be expressed in terms of $\boldsymbol{\Gamma}$, as:

$$\frac{D\boldsymbol{\Gamma}}{Dt} = -\frac{1}{De}\boldsymbol{\Gamma} + \left(\mathbf{S}\boldsymbol{\Gamma} + \boldsymbol{\Gamma}\mathbf{S} - \frac{2}{3}\{\boldsymbol{\Gamma}\mathbf{S}\}\mathbf{I} \right) - (\mathbf{W}\boldsymbol{\Gamma} - \boldsymbol{\Gamma}\mathbf{W}) + 2 \left(\frac{\eta_1}{De} + \frac{1}{3}I_\tau \right) \mathbf{S}. \quad (8)$$

In order to close (8), an evolution equation for I_τ is needed, which can be obtained directly from Eq. (6). Taking the trace of Eq. (6) and multiplying the Eq. (7) by the deformation rate tensor \mathbf{S} and taking its trace we can write after some algebraic manipulation:

$$\frac{DI_\tau}{Dt} = -\frac{1}{De}I_\tau + 2\{\boldsymbol{\Gamma}\mathbf{S}\}, \quad (9)$$

where the notation $I_\tau = \{\boldsymbol{\tau}\}$ has been used.

In order to apply the strategy, using a polynomial expansion, to obtain an explicit relation for the viscoelastic extra-stress tensor, it is necessary to assume an algebraic form for $\frac{D\boldsymbol{\Gamma}}{Dt}$, on the left hand side of Eq. (8). This is done by requiring that the extra-stress anisotropy tensor $\mathbf{b} = \frac{\boldsymbol{\Gamma}}{I_\tau}$ of a particle is constant, reaching an equilibrium state:

$$\frac{D^\circ\boldsymbol{\Gamma}}{Dt} \approx \frac{\boldsymbol{\Gamma}}{I_\tau} \frac{DI_\tau}{Dt}. \quad (10)$$

This algebraic assumption is a consistent representation for two- and three-dimensional flows. For the case of viscometric flows, it is exactly verified (for details see Mompean et al., 1998). Besides that in nearly viscometric flows, where local effects dominate transport effects, this approach may provide an adequate representation of the extra-stresses. The other thing to notice is that using this assumption the transport terms of the extra-stresses are not completely neglected but replaced by the transport terms of the trace I_τ .

In order to be consistent to the principle of the frame-indifference of the constitutive operator, the time derivative that appears on the left side of Eq.(10) can not be the material derivative. (Thompson, 2001), has proposed a new general form of an objective time derivative for a tensor of second order \mathbf{M} :

$$\frac{D^\circ\mathbf{M}}{Dt} = \frac{D\mathbf{M}}{Dt} - c_1(\mathbf{S}\mathbf{M} + \mathbf{M}\mathbf{S}) - c_2(\mathbf{M}\mathbf{W} - \mathbf{W}\mathbf{M}) - (1 - c_2)(\mathbf{M}\boldsymbol{\Omega} - \boldsymbol{\Omega}\mathbf{M}), \quad (11)$$

where c_1 and c_2 are constants and $\mathbf{\Omega}$ is a tensor related to the rate of rotation of the principal directions of \mathbf{S} . This time derivative satisfies invariance (the operator is the same for all observers in relative motion) and preserves symmetry (in the sense that this rate of a symmetric tensor is necessarily symmetric) for all values of c_1 and c_2 . Particular choices of these coefficients correspond to the three well known time derivatives used in literature: the contravariant convected time derivative; the covariant convected time derivative and the corotational or Jaumann derivative. Another derivative based exclusively on $\mathbf{\Omega}$ called corotational-eigenvectors-of- \mathbf{S} derivative, is also obtained.

These possibilities can be put together in Eq. (8) replacing c_1 and c_2 with two new coefficients $\alpha_1 = 1 - c_1$ and $\alpha_2 = 1 - c_2$, :

$$-\frac{\mathbf{\Gamma}}{I_\tau} \left(\frac{DI_\tau}{Dt} + \frac{I_\tau}{De} \right) + \left(\alpha_1 (\mathbf{S}\mathbf{\Gamma} + \mathbf{\Gamma}\mathbf{S}) - \frac{2}{3} \{\mathbf{\Gamma}\mathbf{S}\}\mathbf{I} \right) - \alpha_2 (\overline{\mathbf{W}}\mathbf{\Gamma} - \mathbf{\Gamma}\overline{\mathbf{W}}) + 2 \left(\frac{\eta_1}{De} + \frac{1}{3} I_\tau \right) \mathbf{S} = 0, \quad (12)$$

where $\overline{\mathbf{W}} = \mathbf{W} - \mathbf{\Omega}$, and the four particular cases can be summarized as

- i) $\alpha_1 = \alpha_2 = 0$, contravariant convected time derivative,
- ii) $\alpha_1 = 2$ and $\alpha_2 = 0$, covariant convected time derivative,
- iii) $\alpha_1 = 1$ and $\alpha_2 = 0$, corotational derivative,
- iv) $\alpha_1 = \alpha_2 = 1$, corotational-eigenvectors-of- \mathbf{S} derivative

With this approximation it is now possible to transform Eq. (8) into an algebraic tensor equation to be solved explicitly ($\mathbf{\Gamma} = \mathbf{\Gamma}(\mathbf{S}, \overline{\mathbf{W}}, I_\tau)$). The expression for the explicit algebraic extra-stress is obtained using a general polynomial tensor for the kinematic tensor, for the representation of $\mathbf{\Gamma}$. In the frame of Newtonian turbulent flows, Pope, 1975 has used a tensor polynomial expansion to obtain an explicit algebraic representation for the Reynolds stress tensor equation. With an analogous procedure, Gatski and Speziale, 1993 extended this analysis to three dimensional flows obtaining an algebraic stress model from a differential second-moment closure for turbulent flows. Since the tensor $\mathbf{\Gamma}$ is symmetric and traceless, the same ideas are applied here and the tensor $\mathbf{\Gamma}$ for the extra-stresses can be represented as:

$$\mathbf{\Gamma} = \sum_{n=1}^N \beta_n \mathbf{T}^{(n)}, \quad (13)$$

where the basis $\mathbf{T}^{(n)}$ is given symmetric traceless tensor functions of \mathbf{S} and $\overline{\mathbf{W}}$, and the scalar coefficients β_n are functions of the invariants of $\mathbf{\Gamma}$, \mathbf{S} and $\overline{\mathbf{W}}$.

Using the Eq.(9) for the trace I_τ and expressing Eq.(13) with the three-term base: $\mathbf{T}^{(1)} = \mathbf{S}$, $\mathbf{T}^{(2)} = \mathbf{S}\overline{\mathbf{W}} - \overline{\mathbf{W}}\mathbf{S}$ and $\mathbf{T}^{(3)} = \mathbf{S}^2 - \frac{1}{3}\{\mathbf{S}^2\}\mathbf{I}$, that gives an exact representation for 2-D flows, we have:

$$\begin{aligned} \mathbf{\Gamma} = & \frac{1}{\{\mathbf{S}^2\}} \left[\left(\frac{\eta_1}{De} + \left(\frac{(\alpha_1)^2}{2} - \frac{\alpha_1}{3} + \frac{1}{3} \right) I_\tau \right) I_\tau \{\mathbf{S}^2\} + \frac{(\alpha_2)^2}{2} I_\tau^2 \{\overline{\mathbf{W}}^2\} \right]^{1/2} \mathbf{S} + \\ & + \frac{I_\tau}{\{\mathbf{S}^2\}} \left[\frac{\alpha_2}{2} (\mathbf{S}\overline{\mathbf{W}} - \overline{\mathbf{W}}\mathbf{S}) + (3\alpha_1 - 2) \left(\mathbf{S}^2 - \frac{1}{3} \{\mathbf{S}^2\} \mathbf{I} \right) \right] \end{aligned} \quad (14)$$

The use of the general derivative (11) and the new formulation (14) with the coefficients α_1 and α_2 have given a flexibility to the model as it will be shown on the next section.

3.2. Predictions for N_2

The Oldroyd-B constitutive equation (c. e.) can not predict the second normal stress difference in shear, N_2 . In fact, using a dimensional approach, it can be shown that, in shear, the predictions for the tensor $\mathbf{\Gamma}$ with the Oldroyd-B constitutive model are the following:

$$[\mathbf{\Gamma}] = \begin{bmatrix} \frac{2}{3}N_1 & 0 & 2\eta_1^* S_{13} \\ 0 & -\frac{1}{3}N_1 & 0 \\ 2\eta_1^* S_{13} & 0 & -\frac{1}{3}N_1 \end{bmatrix}. \quad (15)$$

where N_1 is the first normal stress difference in pure shear flow. While for the AESM (14), the predictions, in shear, for $\mathbf{\Gamma}$ are:

$$[\mathbf{\Gamma}] = \begin{bmatrix} \frac{1}{2}N_1(\alpha_1 + \alpha_2 - \frac{2}{3}) & 0 & 2\eta_1^*S_{13} \\ 0 & \frac{1}{2}N_1(\alpha_1 - \alpha_2 - \frac{2}{3}) & 0 \\ 2\eta_1^*S_{13} & 0 & N_1(-\alpha_1 + \frac{2}{3}) \end{bmatrix}. \quad (16)$$

If one wants to maintain the same prediction as the Oldroyd-B model for shear with AESM, a comparison between (15) and (16) would lead to a conclusion that $\alpha_1 = \alpha_2 = 1$ are the proper choices. It is easy to show that for a real shear flow the traceless tensor $\mathbf{\Gamma}$ is given by:

$$[\mathbf{\Gamma}] = \begin{bmatrix} \frac{1}{3}(2N_1 + N_2) & 0 & 2\eta_1^*S_{13} \\ 0 & -\frac{1}{3}(N_1 - N_2) & 0 \\ 2\eta_1^*S_{13} & 0 & -\frac{1}{3}(N_1 + 2N_2) \end{bmatrix}. \quad (17)$$

When (16) and (17) are compared, it can be seen that

$$\alpha_1 = 1 + \frac{2}{3} \frac{N_2}{N_1}, \quad (18)$$

and $\alpha_2 = 1$, would give AESM a prediction for N_2 . If the material has no second stress difference, the same previous values for the coefficients are found, namely, $\alpha_1 = \alpha_2 = 1$. Therefore, even in this case, where AESM model is originated from the Oldroyd-B c. e., the capability of prediction for the components of the traceless stress tensor of the real shear flow has increased with this formulation. A more general conclusion is that depending on the choice of the parameters α_1 and α_2 , a certain rheological function is predicted more or less precisely. This conclusions gives an important reason for an investigation of which kind of kinematics the material is going through. For example, if the flow is predominantly extensional, then, other guidelines (good prediction of extensional rheological properties) are given for proper choices of the parameters α_1 and α_2 .

3.3. Flow-type sensitive classifier

In order to characterize the flow, the criterium presented in Astarita, 1979, based on the invariance of the relative-rate-of-rotation tensor, is used here. The deformation rate parameter (s^2) and the rotation rate parameter (w^2) are defined respectively as:

$$s^2 = tr(\mathbf{S}^2) = S_{mn}S_{nm} \quad \text{and} \quad w^2 = -tr(\overline{\mathbf{W}}^2) = -\overline{W}_{mn}\overline{W}_{nm}. \quad (19)$$

Defining R as the ratio between these two quantities:

$$R = \frac{w^2}{s^2} = -\frac{\overline{W}_{mn}\overline{W}_{nm}}{S_{mn}S_{nm}} \quad (20)$$

which will take values from 0 to ∞ .

This kind of parameter can be used to classify flows. It is local, objective, is not restricted to a class of flow and is entirely kinematic (there is no material property involved). It is a measure of how much the material avoids stretching through a rotation (related to the principal directions of stretching). In this sense, it is expected that at one side of the limiting cases stands the extensional kinematics, because the material is not avoiding to be stretched at all; while at the other side is the rigid body motion, when the material is not stretched. In fact, it can be shown (Astarita, 1979) that for pure extensional flow, $R = 0$ and as the flow approximates to a solid body motion, $R \rightarrow \infty$. Every other kind of flow lies in between, including pure shear flows, where $R = 1$, which is considered to be another limiting case (on a 2-D Cartesian flow the value $R = 1$ is the supremum for elliptical flows (Astarita, 1991), and a infimum for strong flows, (Tanner and Huilgol, 1975)). This parameter was used in constitutive models first in Schunk and Scriven, 1990, where extensional and shear viscosity effects were decoupled; in Souza Mendes et al., 1995, where a new weight function for the viscosity was proposed and the prediction for the second normal stress difference was included and in Thompson et al., 1999, where all the rheological functions for stationary flow, in shear (including the first normal stress difference) and extension are being carried to regions of complex flows.

In the results, this quantity is normalized to avoid numerical problems when $R \rightarrow \infty$:

$$D = \frac{1 - R}{1 + R}. \quad (21)$$

The scalar D will take values between -1 and +1. For pure shear flow, $D = 0$; for pure extensional flow, $D = +1$ and as the flow approximates to a solid body motion, $D \rightarrow -1$. This parameter is used, in this present work, as a guide for the analysis of the comparisons that are made. As this quantity is entirely kinematics, the Newtonian solution is used to produce a D field. With this map that places the type of kinematics that the fluid is going through, there were chosen axial positions which would make physically relevant the comparisons between the cases. Besides that, this parameter was essential on the interpretation of this results.

4. Numerical method

In order to obtain the extra-stress components for the Oldroyd-B fluid, the viscoelastic numerical simulations presented in this work are doing using two different set of equations: i) the constitutive equations in a differential form and ii) the algebraic extra-stress model (AESM).

To solve these equations a finite volume numerical method has been successfully employed. The spatial discretisation is performed in a staggered grid (Patankar, 1980). The non-linear terms (convective flux) of the momentum equations, the advection terms of the constitutive equations for the Oldroyd-B differential model, and the advection terms for the trace of the extra-stress tensor (when using the AESM formulation), are obtained by a second-order accuracy scheme, namely QUICK (Quadratic Upstream Interpolation Scheme for Convective Kinematics) proposed by Leonard, 1979. The diffusion terms of the momentum equations are calculated with the second-order accuracy centered difference scheme. The pressure and the normal stress components of the viscoelastic tensor are treated at the center of the control volumes. The velocities are staggered and evaluated at the center of the faces; the off-diagonal components of the viscoelastic tensor are attached to nodes at the mid-edges. In order to evaluate the shear extra-stress component (off-diagonal term), for example $(\tau_{13}(i, k))$, its equation is solved at the center of the cell with the normal components, and then the values are extrapolated linearly for the corner of the cell. A regular spaced mesh with 3.000 nodes (75 nodes in the streamwise direction (x) and 40 nodes in the normal direction (z) has been used. The grid has been built using the following geometrical dimension: 20H for the streamwise direction and 4H for the normal direction, where H is half the height of the outflow channel (see Fig.5.1). The used regular mesh presents 60 nodes before the entrance ($L_e = 16h$) and 15 nodes after the entrance ($L_0 = 4H$). In the region after the abrupt entrance, 10 nodes were used to discretized the outflow channel in the normal direction.

The decoupling procedure employed for the pressure is derived from the work of Harlow and Welch, 1965. Details of this algorithm used to solve viscoelastic flows have been well documented in a previous work (Mompean and Deville, 1997), and will be briefly described here.

>From the momentum conservation equation, a discrete Poisson equation is obtained for the pressure by enforcing the mass conservation implicitly. In the momentum equation, the diffusion terms due to the Newtonian stresses (solvent) and due to the extra-stress components (viscoelastic fluid) are treated explicitly. The non-linear terms are also evaluated explicitly. The differential constitutive equation for the Oldroyd-B fluid is solved using an Euler explicit scheme. With such information, the right hand side (B) of the linear system for the pressure is evaluated at time n , and the new pressure values are calculated at time $n + 1$.

$$[A]p^{n+1} = B^n \quad (22)$$

The matrix $[A]$ of the system, used to obtain the pressure (p) at $n + 1$, is symmetric and positive definite. It can be solved by a direct Cholesky factorization or by a preconditioned conjugate gradient method. This scheme represents a real evaluation in time (no pseudo-transient algorithm is used here). The steady-state solution is computed by the convergence of a time dependent process.

4.1. Boundary conditions

For the momentum equation the same boundary conditions were used when solving the Oldroyd-B differential constitutive equations or when solving the AESM. These conditions were:

- 1) At the *inlet* a parabolic profile is given for the U velocity.
- 2) At the *walls*, the no-slip condition is applied to the velocities.
- 3) At the *outlet* of the domain a Neumann condition is used for all variables, except the pressure. A zero reference value is given for the pressure at the exit.

When solving the Oldroyd-B constitutive equations, the extra-stress components are deduced from a plane Poiseuille flow and, and at the inlet of the domain the following values are given:

- $\tau_{11} = 2\eta_1 De(\partial u/\partial z)^2$,
- $\tau_{33} = 0$,
- $\tau_{13} = \eta_1(\partial u/\partial z)$.

For the AESM, in the inlet only one boundary condition has to be given (the trace of the extra-stress tensor) to the viscoelastic model. For a developed Poiseuille flow the trace is:

- $I_\tau = 2\eta_1 De(\partial u/\partial z)^2$

5. Results

For a first study of the new theory presented, it was decided to compare only the stress tensor of the different models. So the calculation that was done, was based on a given kinematics. On the present work, the velocity field was the Newtonian solution of the problem.

5.1. Newtonian Fluid

For the numerical simulation of the Newtonian flow through the 4:1 contraction, different grids were used in order to check the grid independence in the results. In this section we show the results obtained with a regular spaced grid of 3,000 nodes (75 nodes in the streamwise direction x by 40 nodes in the normal direction z). The influence of the entry upstream length (L_e) on the results was verified; to permit the development of the flow in the entry region, the ratio 4 between the entry upstream length (L_e) and the outlet downstream length (L_o) was used (see Fig. 5.1), which corresponds to corner step at $x = 16$. The dimensionless size of the recirculation, $X_v = L_v/2H_u$, is equal to 0.18, which is in good agreement with previous calculation for this flow (Phillips and Williams, 1999). As a first step, to verify the influence of new terms in the frame-invariant model, the eigenvectors of the strain deformation stress tensor \mathbf{S} have been calculated for a Newtonian creeping flow through a contraction. The Reynolds number based on the averaged exit velocity and on the downstream height was 0.01.

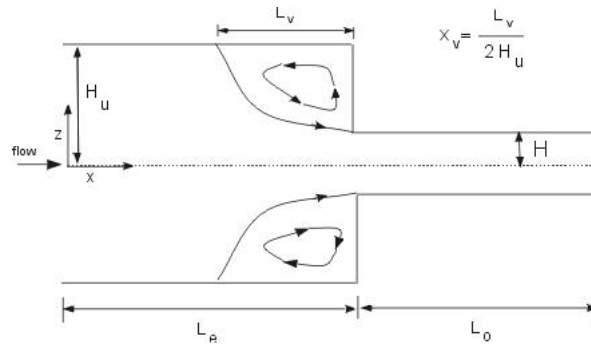


Figure 1: Geometrical parameters for the contraction

5.2. Predictive capability of the AESM

5.2.1. The flow-type classifier - D

The contour values for parameter D inside the 4:1 contraction are shown on Fig. 5.2.1. The three limiting types of flow (extensional, shear and solid body) are clearly found.

The regions near the horizontal walls, where the flow is developed close to the inlet and to the outlet, are characterized by pure shear, which corresponds to values of the deformation parameter D going to zero.

Just before the entrance of the abrupt contraction, a region of pure elongational flow is shown, which is represented by the white contours, where the values of D are close to one. Another region where the flow starts to elongate is where the streamlines curve to enter at the smaller section. These two regions can be seen as parts of the same region (because they depend on the range of D choices). It is expected that the presence of a contraction, or equally, the passage to a region where (for incompressible fluids) the mean velocity is higher, cause stretching to the fluid. For a material filament aligned with the velocity vector that presence affects the forward point of this filament strongly then the back the backward and as a consequence an original filament located at the left side of the contraction has a higher length.

Concerning the elliptical flows (flows between shear and solid body motion), three regions are presented where the values of the parameter D become negative: a) the first one, just after the sharp corner; b) a second one near the corner vortex, in the vertical wall; and c) the third one just before the extensional region at the entrance of the smaller section. The two first regions are easy to justify: at the corner there are closed vortices that rotate and it is expected that the rotation rate there is to be bigger then the deformation rate; at the lip, the near fluid has to make a hard orthogonal turn and the rate of rotation again is bigger. The third region, can not be seen as rotation motion but as a motion close to a “plug-flow”. At a first glance it is strange that between

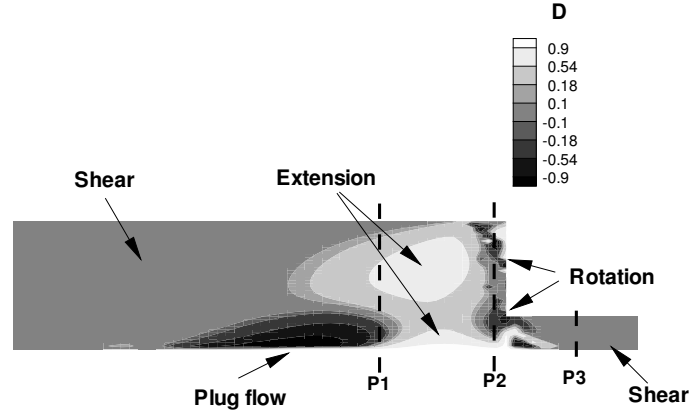


Figure 2: D flow type classifier

a region of (expected) shear ($D = 0$) and of (expected) extension ($D = 1$), appears a region of rigid body motion ($D \rightarrow -1$). The explanation here (for details, see Thompson, 2001) is done by examining what is happening, separately, with the deformation and the rotational rate parameters (19). The first thing to notice is that the deformation rate at the shear region vanishes at the centerline and has its maximum at the wall. So, concerning a particle that is near to the centerline region, it starts from a low deformation rate, but the eigenvectors of \mathbf{S} have to change their direction: from the region of shear, where the principal directions are at $\pm \frac{\pi}{4}$ rotated axis, to the region of extension, where they are aligned with the axis. The results indicate that for this region, changes on the eigenvectors directions are done with higher gradients than the changes on deformation rates. It can be seen that the opposite effect happens for regions far from the centerline where transition from shear to extension is done in a smooth (concerning the D parameter) way.

5.2.2. Comparison between the particular cases

The three axial positions marked with a dashed line, namely, $P1$, $P2$ and $P3$, respectively at dimensionless positions $x = 12$, $x = 15.5$ and $x = 18$; shown on Fig. (5.2.1), were chosen for a deeper study at the components of the traceless tensor $\mathbf{\Gamma}$. The first one, $P1$, is a position where there are all kinds of motion along the axis, and the changes are done in a smooth way. Position $P2$, is where really strong gradients of D occur. It takes the vortex region, the region near the lip and the extensional region close to the centerline. And the third one, $P3$, is a position where the fluid, along the line, does not go through changes on its type of flow, which is pure shear. The comparisons are made for six particular cases corresponding to: the Oldroyd-B constitutive equation, the non-objective one, AESM- \mathbf{W} , and four others objective AESMs (all of this five Oldroyd-B based), each of them corresponding to the particular forms of the general frame-indifferent time derivative (11).

Position $P3$, was used to validate the results obtained by the numerical code, as the solution for viscometric flow can be calculated analytically by equations (16) and (15). For the $\mathbf{\Gamma}_{11}$ AESM objective component, the coefficient multiplying N_1 is $\frac{1}{2}(\alpha_1 + \alpha_2 - \frac{2}{3})$. It was seen an exact agreement between the three models that have the same value for $\alpha_1 + \alpha_2$ and the excellent (expected, Subsection 3.2) agreement with $\mathbf{\Gamma}_{11}$ component obtained with the Oldroyd-B c. e.. The other two behaviors were also consistent, including the negative values for the case $\alpha_1 = 0$, $\alpha_2 = 0$; as in this case, $\alpha_1 + \alpha_2 < \frac{2}{3}$. The cross component was also compared. It was seen that in this case the predictions were again confirmed by the analytical results. It is a linear function with the normal axis, as the shear rate.

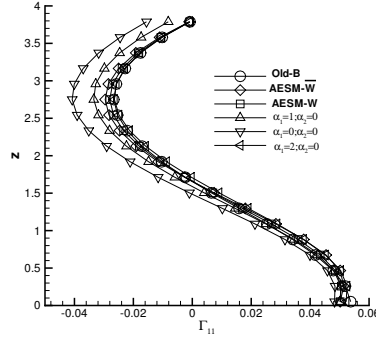


Figure 3: T11 at position P1 (x=12)

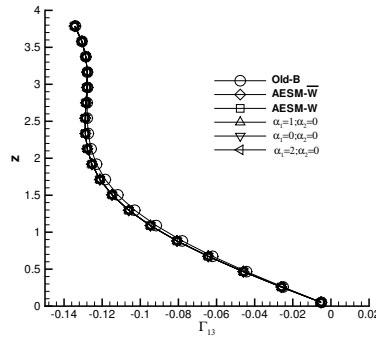


Figure 4: T13 at position P1 (x=12)

The figures (5.2.2) and (5.2.2) are showing the Γ_{11} and Γ_{13} components, of the traceless tensor, for the six cases at position $P1$. The qualitative results are the same for all cases. For the Γ_{13} component there is no difference for the five cases with the AESM formulation. There is an exact agreement concerning the points close to the wall and very near the centerline. The Oldroyd-B results differ a little at the region corresponding to the transition from the plug-flow region to the extensional one. This difference can be caused by the numerical code. For the Γ_{11} component it can be seen that all the cases are bounded by the contravariant ($\alpha_1 = 0, \alpha_2 = 0$) case from the left and the covariant ($\alpha_1 = 2, \alpha_2 = 0$) from the right. Generally, the cases where $\alpha_1 + \alpha_2 = 2$ have a similar behavior to the one obtained with the Oldroyd-B c. e..They present a more similar behavior to each other near the centerline.

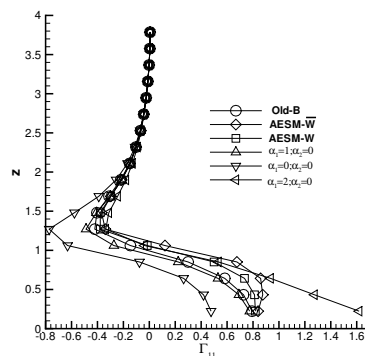
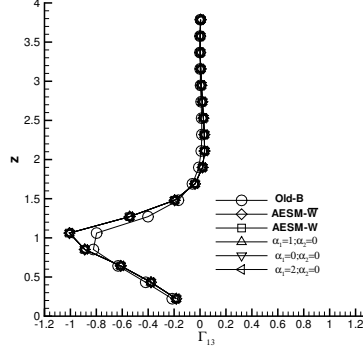


Figure 5: T11 at position P2 (x=15,5)

At position $P2$, the results obtained for the cross component Γ_{13} were analogous to the ones at position $P1$, in the sense that all the cases with the AESM formulation were coincident. Fig. (5.2.2) shows, also, the


 Figure 6: T13 at position P2 ($x=15,5$)

good agreement with ones obtained with the original differential constitutive equation, including the region of negative values, until $z \approx 1.7$. It can be seen that passing this point, where, as it is shown on Fig. (5.2.1), the influence of the singular point (at the entrance of the contraction) is not relevant, Γ_{13} vanishes. Concerning predictions for the Γ_{11} component, analysis of Fig. (5.2.2) shows that is α_1 (and not $\alpha_1 + \alpha_2$) the parameter that governs its behavior. The explanation is that, near the extensional region, $\overline{\mathbf{W}}$ is small, and so α_2 , (8), has no influence.

5.2.3. The second normal stress difference in shear - N_2

The other result of interest is the case with a prediction for a non vanishing second normal stress difference in pure shear, N_2 . It is known that the Oldroyd-B c. e. predicts a constant first normal stress coefficient in pure shear, Ψ_1 . Generally, the Deborah number is related to a characteristic time, λ , based on Ψ_{10} , the limit value for Ψ_1 when $\dot{\gamma} \rightarrow 0$. As the analytical results has shown (18), it is necessary to evaluate the ratio $\frac{N_2}{N_1}$ in order to find α_1 . An analysis of the rod-climbing phenomena (present only in elastic fluids) with an approximation of a second order fluid was made in Joseph, 1990. This analysis has given the following range for the coefficient, Ψ_{20} (the limit value for the second normal stress coefficient in pure shear, Ψ_2 , when $\dot{\gamma} \rightarrow 0$) related to Ψ_{10} : $-0.25\Psi_{10} \leq \Psi_{20} \leq 0$. For many polymeric liquids $\Psi_{20} = -0.1\Psi_{10}$. So this was chosen as a particular case: $N_2 = -0.1N_1$. With that assumption, the values for the coefficients of Eq. (8) are $\alpha_1 = 0.9333\dots$ and $\alpha_2 = 1$. Obviously, the function $N_2(\dot{\gamma})$ is parabolic, as Ψ_2 is constant, $\dot{\gamma}$ is linear and $N_2 = \Psi_2\dot{\gamma}^2$.

6. Concluding remarks

In the present work was presented a general procedure for obtaining an objective algebraic model for the extra stress tensor (AESM), starting from any differential constitutive model, for a 3-D, transient flow. The process is done towards a decrease on the computation efforts. It reduces the set of differential equations for the components of the extra stress tensor to only one differential equation for its trace and an explicit equation for the traceless stress tensor. This is done by an assumption based on an analogy with turbulent flows in which the extra-stress anisotropy tensor reaches equilibrium, in other words its time derivative vanishes. A general objective time derivative is used to accomplish that assumption and to give flexibility to the model.

These general ideas are applied to the Oldroyd-B constitutive model with a three-term base of tensors (that gives an exact representation for the traceless tensor in 2-D flows) to study the particular case of a steady, 2-D planar, 4:1 abrupt contraction. A theoretical analysis showed the possibility of including a prediction for the viscometric second normal stress difference (that is not predicted by the original model) and indicate that regions where the advection of the stress tensor can be neglected, the Deborah number is limited. The Newtonian velocity field solution of the problem is used to compute and compare the stress tensor for other (then the Oldroyd-B) five different cases of AESM formulation, namely, a non-objective one (AESM-W) and four other ones originated by particular choices of the general objective time derivative corresponding to: the contravariant and covariant convected time derivatives, the corotational (or Jaumann) derivative and to another kind of corotational derivative based on the rate of rotation of the eigenvectors of the deformation rate tensor (AESM- $\overline{\mathbf{W}}$). A field of a parameter, D , that is sensitive to the type of the flow (viscometric, extensional, solid body) was used to indicate the positions of comparison and to understand similar and different behaviors between the models. In this way, parameter D was an excellent tool, and can be used not only when calculations are done with the AESM, but in general when different constitutive models are being compared.

For the position of the viscometric flow, the results were the same as predicted by the theoretical analysis:

the same cross component of the traceless tensor and the principal normal component dependent on the sum of the two free coefficients of the explicit equation, α_1 and α_2 .

For the other two positions, in general, the results were bounded by the contravariant and covariant time derivatives, but qualitatively, all the cases had similar behavior and quantitatively, it could be seen that AESM- $\overline{\mathbf{W}}$ and AESM- \mathbf{W} , sometimes with the covariant derivative and others with the corotational one, could capture the same predictions of the Oldroyd-B model. This has shown that, at least for the studied cases, the basic assumption for the equilibrium of the extra-stress anisotropy tensor was a good approximation and has led to well behaved solutions. For a general conclusion, the next step is to obtain solutions for the present problem with the cases presented, solving the velocity field, for a range of Re and De .

The inclusion of the prediction for N_2 , was an interesting result. Although the formulation is based on an original differential model, being a simplified version of it (in the sense described on the first paragraph), there was an increase in the capability of prediction in a sense that another rheological property is captured. This result indicates that the AESM based on the White-Metzner constitutive model (a generalization of the Oldroyd-B one) that gives a dependence on the shear rate for the shear viscosity, $\eta = \eta(\dot{\gamma})$, and first normal stress coefficient, $\Psi_1 = \Psi_1(\dot{\gamma})$, but does not predict second normal stress coefficient would probably include a prediction, for this rheological function, of the type $\Psi_2 = \Psi_2(\dot{\gamma})$.

Other constitutive models that have a better prediction for the extensional rheological functions can be used to derive more general AESMs. If the parameters α_1 and α_2 are generalized to be functions of the second invariants of \mathbf{S} and $\overline{\mathbf{W}}$, this will allow predictions not only for the limiting cases (shear flow, extensional flow and solid body motion) but to the regions of complex flows to where this information can be carried to.

7. Acknowledgments

This work was funded by grants from the project between CAPES and COFECUB and from FAPERJ.

8. References

- Astarita, G., 1979, "Objective and generally applicable criteria for flow classification", *J. Non-Newtonian Fluid Mech.*, Vol. 6, pp. 69–76.
- Astarita, G., 1980, "Reply to R. R. Huilgol", *J. Non-Newtonian Fluid Mech.*, Vol. 6, pp. 69–76.
- Astarita, G., 1991, "Quasi-Newtonian constitutive equations exhibiting flow-type sensitivity", *J. Rheol.*, Vol. 35(4), pp. 687–689.
- Baaijens, F. T. P., 1993, "Numerical analysis of start-up planar and axisymmetric contraction flows using multi-mode differential constitutive models", *J. Non-Newtonian Fluid Mech.*, Vol. 48, pp. 147–180.
- Bahraoui, E. M. and Fulachier, L., 1985, *Quelques résultats sur un jet turbulent axisymétrique chauffée*, Technical report, Institut de Mécanique Statistique de la Turbulence, Marseille, France.
- Barnes, H. A., 1999, "The yield stress – a review", *Journal of Non-Newtonian Fluid Mechanics*, Vol. 81, pp. 133–178.
- Binding, D. M., 1988a, "An approximate analysis for contraction and converging flows", *Journal of Non-Newtonian Fluid Mechanics*, Vol. 27, pp. 173–189.
- Binding, D. M., 1988b, "Further considerations of axisymmetric contraction flows", *Journal of Non-Newtonian Fluid Mechanics*, Vol. 41, pp. 27–42.
- Binding, D. M. and Walters, K., 1988, "On the use of flow through a contraction in estimating the extensional viscosity of mobile polymer solutions", *Journal of Non-Newtonian Fluid Mechanics*, Vol. 30, pp. 233–250.
- Bird, R. B. and Wiest, J. M., 1995, "Constitutive equations for polymeric liquids", *Annu. Rev. Fluid Mech.*, Vol. 27, pp. 168–193.
- Bodart, C. and Crochet, M., 1993, "Time-dependent numerical simulation of viscoelastic flow and stability", *Theoret. Comput. Fluid Dynamics*, Vol. 5, pp. 57–75.
- Boger, D. V., 1987, "Viscoelastic flows through contractions", *Annu. Rev. Fluid Mech.*, Vol. 19, pp. 157–182.
- Canuto, C., Hussaini, M., Quarteroni, A., and Zang, T., 1988, "Spectral Methods in Fluid Dynamics", Springer Series in Computational Physics, Springer-Verlag, New-York.
- Cogswell, F. N., 1972, *Polym. Eng. Sci.*, Vol. 12, pp. 64–73.
- Coleman, B. D., 1962, *Arch. Rational. Mech.*, Vol. 9, pp. 273–300.
- Comte-Bellot, G. and Corssin, S., 1966, "The use of a contraction to improve the isotropy of grid-generated turbulence", *J. Fluid Mech.*, Vol. 25, pp. 257–682.
- Crochet, M. J., Davies, A. R., and Walters, K., 1984, "Numerical Simulation of Non-Newtonian Flow", Elsevier, Amsterdam.
- Crow, S. C., 1968, "Viscoelastic properties of fine-grained incompressible turbulence", *J. Fluid Mech.*, Vol. 33, pp. 1–20.

- Demuren, A. O. and Rodi, W., 1984, "Calculation of turbulence-driven secondary motion in non-circular ducts", *J. Fluid Mech.*, Vol. 140, pp. 189–222.
- Drouot, R., 1976, "Définition d'un transport associé un modèle de fluide du deuxième ordre. Comparaison de diverses lois de comportement.", *C. R. Acad. Sc. Paris, Série A*, Vol. 282, pp. 923–926.
- Drouot, R. and Lucius, M., 1976, "Approximation du second ordre de la loi de comportement des fluides simples. Lois classiques déduites de l'introduction d'un nouveau tenseur objectif", *Archiwum Mechaniki Stosowanej*, Vol. 28 (2), pp. 189–198.
- Dupret, F., Marchal, J. M., and Crochet, M. J., 1985, "On the consequence of discretization errors in the numerical calculation of viscoelastic flow", *J. Non-Newtonian Fluid Mech.*, Vol. 18, pp. 173–186.
- El Hadj, M. and Tanguy, P. A., 1990, "A finite element procedure coupled with the method of characteristics for simulation of viscoelastic fluid flow", *J. Non-Newtonian Fluid Mech.*, Vol. 36, pp. 333–349.
- El Yahyaoui, O., Mompean, G., and Naji, H., 2002, "Évaluation a priori d'un modèle non-linéaire de turbulence", *Comptes rendus de l'Académie des sciences, Série IIb - Mécanique*, Vol. 130, pp. 27–34.
- Evans, R. E. and Walters, K., 1986, "Flow characteristics associated with abrupt changes in geometry in the case of highly elastic liquids", *J. Non-Newtonian Fluid Mech.*, Vol. 20, pp. 11–29.
- Evans, R. E. and Walters, K., 1989, "Further remarks on the lip-vortex mechanism of vortex enhancement in planar-contraction flows", *J. Non-Newtonian Fluid Mech.*, Vol. 32, pp. 95–105.
- Fortin, M. and Esselaoui, D., 1987, "A finite element procedure for viscoelastic flows", *Int. Journal for numerical methods in fluids*, Vol. 7, pp. 1035–1052.
- Gatski, T. B. and Speziale, C. G., 1993, "On explicit algebraic stress models for complex turbulent flows", *J. Fluid Mech.*, Vol. 254, pp. 59–78.
- Gavrilakis, S., 1992, "Numerical simulation of low-Reynolds-number turbulent flow through a straight square duct", *J. Fluid Mech.*, Vol. 244, pp. 101–129.
- Gibson, M. M. and Launder, B. E., 1979, "Ground effects on pressure fluctuations in the atmospheric boundary layer", *Journal of Fluid Mechanics*, Vol. 86, pp. 491–511.
- Hansen, E. and Kelmanson, M., 1994, "An integral equation justification of the boundary conditions of the driven cavity problem", *Computers and Fluids*, Vol. 23, pp. 225–240.
- Harlow, F. H. and Welch, J. E., 1965, "Numerical calculation of time-dependent viscous incompressible flow of fluid with free surface", *Phys. Fluids*, Vol. 8, pp. 2182–2189.
- Huilgol, R. R., 1980, "Comments on 'Objective and generally applicable criteria for flow classification', by G. Astarita", *J. Non-Newtonian Fluid Mech.*, Vol. 7, pp. 91–95.
- Huilgol, R. R. and Phan-Thien, N., 1986, *Int. J. Engng. Sci.*, Vol. 24, pp. 171–179.
- Huser, A. and Biringen, S., 1993, "Direct numerical simulation of turbulent flow in a square duct", *J. Fluid Mech.*, Vol. 257, pp. 65–95.
- Jeandel, D., Brison, J. F., and Mathieu, J., 1978, "Modeling methods in physical and spectral space", *Phys. Fluids*, Vol. 21, n. 2, pp. 169–182.
- Jongen, T. and Gatski, T., 1998, "General explicit algebraic stress relations and best approximation for three-dimensional flows", *International Journal of Engineering Science*, Vol. 36, pp. 739–763.
- Jongen, T., Mompean, G., and Gatski, T., 1998a, "Accounting for Reynolds stress and dissipation rate anisotropies in inertial and noninertial frames", *Phys. Fluids*, Vol. 10, pp. 674–684.
- Jongen, T., Mompean, G., and Gatski, T., 1998b, "Predicting S-duct flow using a composite algebraic stress model", *AIAA Journal*, Vol. 36, n. 3, pp. 327–335.
- Joseph, D. D., 1990, "Fluid Dynamics of Viscoelastic Liquids", *Applied Mathematical Sciences*, Springer-Verlag, New-York.
- Keunings, R., 1986, "On the high Weissenberg number problem", *J. Non-Newtonian Fluid Mech.*, Vol. 20, pp. 209–226.
- Keunings, R., 1990, "Progress and challenges in computational rheology", *Rheol. Acta*, Vol. 29, pp. 556–570.
- Keunings, R. and Crochet, M. J., 1984, "Numerical simulation of the flow of a viscoelastic fluid through an abrupt contraction", *J. Non-Newtonian Fluid Mech.*, Vol. 14, pp. 279–299.
- Ladevèze, J. and Peyret, R., 1974, "Calcul numérique d'une solution avec singularité des équations de Navier-Stokes: écoulement dans un canal avec variation brusque de section", *Journal de Mécanique*, Vol. 13, pp. 367–396.
- Launder, B. E., 1975, "On the effects of a gravitational field on the turbulent transport of heat and momentum", *J. Fluid Mech.*, Vol. 67, pp. 569–581.
- Launder, B. E., 1978, "Heat and Mass Transport", In *topics in Applied Physics*, Springer, Berlin.
- Launder, B. E., Reece, G. J., and Rodi, W., 1975, "Progress in the development of a Reynolds-stress turbulence closure", *J. Fluid Mech.*, Vol. 68, pp. 537–566.
- Leonard, B. P., 1979, "A stable accurate convective modelling procedure based on quadratic upstream interpolation", *Comput. Meth. Appl. Mech. Eng.*, Vol. 19, pp. 59–98.
- Lumley, J. L., 1970, "Toward a turbulent constitutive relation", *J. Fluid Mech.*, Vol. 41, pp. 413–434.

- Mackay, M. E. and Astarita, G., 1997, "Analysis of entry flow to determine elongational flow properties", *J. Non-Newtonian Fluid Mech.*, Vol. 70, pp. 219–235.
- Matallah, H., Townsend, P., and Webster, M. F., 1998, "Recovery and stress-splitting schemes for viscoelastic flows", *J. Non-Newtonian Fluid Mech.*, Vol. 75, pp. 139–166.
- McKinley, G. H., Raiford, W. P., Brown, R. A., and Armstrong, R. C., 1991, "Nonlinear dynamics of viscoelastic flow in axisymmetric abrupt contractions", *J. Fluid Mech.*, Vol. 223, pp. 411,456.
- Millionshtchikov, M. D., 1941, "On the role of third moments in isotropic turbulence", *Comptes Rendus de l'Académie des Sciences de l'URSS*, Vol. 32, pp. 619–621.
- Mompean, G., 1989, "Modélisation des écoulements turbulents avec transferts thermiques en convection mixte", PhD thesis, Ecole Centrale de Lyon.
- Mompean, G., 1994, "Three-equation turbulence model for prediction of the mean square temperature variance in grid-generated flows and round jets", *Int. J. Heat Mass Transfer*, Vol. 37, pp. 1165–1172.
- Mompean, G., 1998, "Numerical simulation of a turbulent flow near a right-angled corner using the Speziale nonlinear model with RNG $k - \epsilon$ equations", *Computer and Fluids*, Vol. 27, pp. 847–859.
- Mompean, G., 2001, "On predicting abrupt contraction flows with differential and algebraic viscoelastic models", *Computer and Fluids* (in press), Vol. .
- Mompean, G. and Deville, M., 1996, "Recent developments in three-dimensional unsteady flows of non-Newtonian Fluids", *Revue de l'Institut Français du Pétrole*, Vol. 2, pp. 261–267.
- Mompean, G. and Deville, M., 1997, "Unsteady finite volume simulation of Oldroyd-B fluid through a three-dimensional planar contraction", *Journal of Non-Newtonian Fluid Mechanics*, Vol. 72, pp. 253–279.
- Mompean, G., Gavrilakis, S., Machiels, L., and Deville, M., 1996, "On predicting the turbulence-induced secondary flows using non-linear $k - \epsilon$ models", *Phys. Fluids*, Vol. 8, pp. 1856–1868.
- Mompean, G., Jongen, T., Gatski, T., and M., D., 1998, "On algebraic extra-stress models for the simulation of viscoelastic flows", *Journal of Non-Newtonian Fluid Mechanics*, Vol. 79, pp. 261–281.
- N., P.-T., 1978, "A nonlinear network viscoelastic model", *J. Rheol.*, Vol. 22, pp. 259–283.
- N., P.-T. and I., T. R., 1977, "A new constitutive equation derived from network theory", *J. Non-Newtonian Fluid Mech.*, Vol. 2, pp. 353–365.
- Nguyen, H. and Boger, D. V., 1979, "The kinematics and stability of die entry flows", *J. Non-Newtonian Fluid Mech.*, Vol. 5, pp. 353–368.
- Orszag, S. A., Israeli, M., and Deville, M., 1986, "Boundary conditions for incompressible flows", *J. Scientif. Computing*, Vol. 1, pp. 75–111.
- Ottino, J. M., 1989, "The kinematics of mixing: stretching, chaos, and transport", University Press, Cambridge.
- Pakdel, P. and McKinley, G. H., 1998, "Cavity flows of elastic liquids: Purely elastic instabilities", *Physics of Fluids*, Vol. 10, pp. 1058–1070.
- Patankar, V. S., 1980, "Numerical heat transfer and fluid flow", Hemisphere Publishing Corporation, New York.
- Phillips, T. N. and Williams, A. J., 1999, "Viscoelastic flow through a planar contraction using a semi-Lagrangian finite volume method", *J. Non-Newtonian Fluid Mech.*, Vol. 87, pp. 215–246.
- Pinelli, A., 1995, "Preconditioned Parallel Algorithms and Spectral Solutions For The Incompressible Navier-Sokes Equations", PhD thesis, no:1305, Ecole Polytechnique Fédérale De Lausanne.
- Pope, S., 1975, "A more general effective-viscosity hypothesis", *J. Fluid Mech.*, Vol. 72, pp. 331–340.
- Purnode, B. and Crochet, M. J., 1996, "Flows of polymer solutions through contractions. Part 1: flows of polyacrylamide solutions through planar contractions", *J. Non-Newtonian Fluid Mech.*, Vol. 65, pp. 269–289.
- Quinzani, L. M., Armstrong, R. C., and Brown, R. A., 1994, "Birefringence and laser-Doppler velocimetry (LDV) studies of viscoelastic flow through a planar contraction", *J. Non-Newtonian Fluid Mech.*, Vol. 52, pp. 1–36.
- Renardy, M., Hrusa, J. W., and Nohel, J. A., 1987, "Mathematical Problems in Viscoelasticity", Wiley, New York.
- Reynolds, O., 1895, "On the dynamical theory of Incompressible viscous fluids and the determination of the criterion", *Phil. Trans. Roy. Soc. A*, Vol. 186, pp. 123–164.
- Rivlin, R. S., 1957, "The relation between the flow of non-Newtonian fluids and turbulent Newtonian fluids", *Q. Appl. Maths*, Vol. 15, pp. 212–215.
- Rivlin, R. S. and Ericksen, J. L., 1955, "Stress-deformation relations for isotropic materials", *Arch. Rat. Mech. Anal*, Vol. 4, pp. 323–425.
- Rubinstein, R. and Barton, J. M., 1990, "Nonlinear Reynolds stress models and the renormalization group", *Phys. Fluids A*, Vol. 8, pp. 1472–1476.
- Saad, Y. and Schultz, M. H., 1983, GMRES : A Generalized Minimum Residual Algorithm for Solving Non-symmetric Linear Systems, Technical Report No. YALEU/DCS/RR-254, Yale Univ., New Haven, CT.
- Sasmal, G. P., 1995, "A finite volume approach for calculation of viscoelastic flow through an abrupt axisymmetric contraction", *J. Non-Newtonian Fluid Mech.*, Vol. 56, pp. 15–47.
- Sato, T. and Richardson, S., 1994, "Explicit numerical simulation of time-dependent viscoelastic flow problems

- by finite element/finite volume method”, *J. Non-Newtonian Fluid Mech.*, Vol. 51, pp. 249–275.
- Schunk, P. R. and Scriven, L. E., 1990, “Constitutive equation for modeling mixed extension and shear in polymer solution processing”, *Journal of Rheology*, Vol. 34(7), pp. 1085–1117.
- Shaqfeh, E. S. G., 1996, “Purely elastic instabilities in viscometric flows”, *Ann. Rev. Fluid Mech.*, Vol. 28, pp. 129–185.
- Shih, T., Zhu, J., and Lumley, J. L., 1993, A realizable Reynolds stress algebraic equation model, Technical Report 105993, NASA Lewis Research Center, Cleveland, Ohio, USA.
- Sirivat, A. and Warhaft, Z., 1982, “The effect of a passive cross-stream temperature gradient on the evolution of temperature variance and heat flux in grid turbulence”, *J. Fluid Mech.*, Vol. 128, pp. 323–346.
- Souza Mendes, P. R., Padmanabhan, M., Scriven, L. E., and Macosko, C. W., 1995, “Inelastic constitutive equations for complex flows”, *Rheologica Acta*, Vol. 34, pp. 209–214.
- Speziale, C. G., 1987, “On non-linear k - l and k - ϵ models of turbulence”, *J. Fluid Mech.*, Vol. 178, pp. 459–475.
- Speziale, C. G., Sarkar, S., and Gatski, T. B., 1991, “Modelling the pressure-strain correlation of turbulence: An invariant dynamical system approach”, *Journal of Fluid Mechanics*, Vol. 227, pp. 245–272.
- Tanner, R. I. and Huilgol, R. R., 1975, “On the classification scheme for flow fields”, *Rheol. Acta*, Vol. 14, pp. 959–.
- Tennekes, H. and Lumley, J. L., 1983, “A first course in turbulence”, The MIT Press, Cambridge, Massachusetts.
- Thompson, R. L., 2001, “Performance of a new constitutive equation for non-Newtonian liquids (in portuguese)”, PhD thesis, Pontificia Universidade Católica.
- Thompson, R. L., Souza Mendes, R. P., and Naccache, M. F., 1999, “A new constitutive equation and its performance in contraction flows”, *J. Non-Newtonian Fluid Mech.*, Vol. 86, pp. 375–388.
- Tric, E., Labrosse, G., and Betrouni, M., 1996, Numerical experimentation of the first transition to unsteadiness of air free convection in a differentially heated cubic cavity with non active adiabatic walls, Deville, M., Gavrilakis, S., and Ryming, L., editors, “Computational of Three-Dimensional Complex Flows, Proc. of the IMACS-COS T Conference on Computational Fluid Dynamics, Lausanne, September 13-15, 1995”, Vol. 53, pp. 334–340, Notes on Numerical Fluid Mechanics, Vieweg.
- Warhaft, Z. and Lumley, J., 1978, “An experimental study of decay of temperature fluctuation in grid-generated turbulence”, *J. Fluid Mech.*, Vol. 88, pp. 659–684.
- Xue, S. C., N., P.-T., and I., T. R., 1998, “Three dimensional numerical simulations of viscoelastic flows through planar contractions”, *J. Non-Newtonian Fluid Mech.*, Vol. 74, pp. 195–245.
- Yakhot, V. and Orszag, S. A., 1986, “Renormalisation group analysis of turbulence. I. Basic Theory”, *J. Sci. Comput.*, Vol. 1, pp. 3–51.
- Yakhot, V., Orszag, S. A., Thangam, S., Gatski, T. B., and Speziale, C. G., 1992, “Development of turbulence models for shear flows by a double expansion technique”, *Phys. Fluids*, Vol. 4, pp. 1510–1520.
- Yoo, J. Y. and Na, Y., 1991, “A numerical study of the planar contraction flow of a viscoelastic fluid using the SIMPLER algorithm”, *J. Non-Newtonian Fluid Mech.*, Vol. 39, pp. 89–106.
- Zou, Q., 1998, “A viscoelastic model for turbulent flow over undulating topography”, *J. Fluid Mech.*, Vol. 355, pp. 81–112.